WORKS OF ELLEN H. RICHARDS

PUBLISHED BY

JOHN WILEY & SONS

43-45 East Nineteenth Street, New York

Laboratory Notes on Industrial Water Analysis: A Survey Course for Engineers. 8vo, 52 pages. Cloth, 50c net.

The Cost of Cleanness. 12mo, v+109 pages. Cloth. \$1.00.

The Cost of Living as Modified by Sanitary Science. Third Edition, Revised 12mo. 164 pages. Cloth. \$1.00.

Air, Water, and Food, From a Sanitary Standpoint.
By Ellen H. Richards, with the assistance of Alpheus
G. Woodman, Instructors in Sanitary Chemistry in the Massachusetts Institute of Technology. Second Edition, Revised. 8vo. 270 pages. Cloth. \$2.00.

The Cost of Food: A Study in Dietarles. 12mo. 161 pages. Cloth. \$1.00.

The Dietary Computer.
By Ellen H. Richards, Instructor in Sanitary Chemistry, Massachusetts Institute of Technology, assisted by Louise Harding Williams. \$1.50 net. Pamphlet separately, \$1.00 net. The Cost of Shelter.

12mo. vi + 136 pages. Illustrated. Cloth. \$1.00.

"Cost of Living" Series.
"Cost of Living. 2. Cost of Food. ost of Living. Series.

1. Cost of Living. 2. Cost of Food.
Shelter. 4. Cost of Cleanness. 12mo.
vols. in a box. \$4.00. 3. Cost of Cloth.

Published by WHITCOMB & BARROWS Huntington Chambers

The Chemistry of Cooking and Cleaning.
By Ellen II. Richards and S. Maria Elliott. pages. Cloth. \$1.00.

Food Materials and their Adulterations. 183 pages. Cloth. \$1.00.

Home Sanitation. Revised Edition. Edited by Ellen II. Richards and Marion Talbot. 85 pages. Paper. 250.

Plain Words about Food.
The Rumford Leaflets.
Cloth. \$1.00. Illustrated. 176 pages.

First Lessons on Food Diet. 52 pages. Cloth. 30c net.

The Art of Right-Living.
50 pages. Cloth. 50c net.

LABORATORY NOTES

ON

INDUSTRIAL WATER ANALYSIS

A SURVEY COURSE FOR ENGINEERS

RV

ELLEN H. RICHARDS

INSTRUCTOR IN SANITARY CHEMISTRY, MASSACHUSETTS INSTITUTE
OF TECHNOLOGY

SECOND EDITION, REVISED, WITH ADDITIONS
FIRST THOUSAND

NEW YORK

JOHN WILEY & SONS

LONDON: CHAPMAN & HALL, LIMITED
1910

645.2000 1/15 3060

COPYRIGHT, 1908, 1910, BY ELLEN H. RICHARDS.




Standope Press f. H. Gilson Company Boston, U.S.A.



TABLE OF CONTENTS.

PART I.	
Introduction	PAGE 1-3
FIRST LABORATORY EXERCISE	4-8
SECOND LABORATORY EXERCISE	9–11
THIRD LABORATORY EXERCISE, BOILER WATERS AND WATERS FOR	
General Use	12-14
FOURTH LABORATORY EXERCISE, DYEING, TEXTILE INDUSTRIES,	
Laundries, etc	15-19
FIFTH LABORATORY EXERCISE, CHEMICAL MANUFACTURING, MEDICI-	
NAL PREPARATIONS, SODA WATER, ETC., PRELIMINARY SANI-	
TARY ANALYSIS	20-25
SIXTH LABORATORY EXERCISE, ACTION ON METALS	26-29
SEVENTH LABORATORY EXERCISE, IMPROVEMENT OF UNSATISFACTORY	
Waters	30-32
Notes on Mineral Waters	33-34
PART II.	
STANDARD SOLUTIONS	35-42
Computation of Hypothetical Combinations	43-44
Percentage Composition of Salinity in Various Waters	45
Tables . :	46-52
CONVENIENT DATA	53
Some Useriii, Represences	54



LABORATORY NOTES ON INDUSTRIAL WATER ANALYSIS.

PART I.

INTRODUCTION.

Water is needed for many uses, the quality desired varying with the needs of the industry. The quality of water found depends upon the geological formations over which it flows or through which it percolates, and upon the previous use which man has made of it. Because of the growing scarcity of the supply, the increasing use per capita, the congestion of population and the occupation of even the desert and mountain slope, the securing of either safe potable water or water suited to manufacturing purposes becomes more and more difficult, and there is demanded a closer study of the country's resources and of waters suited to the different uses.

Restrictions will undoubtedly be adopted in the near future preventing not only sheer waste and pollution, but assigning various supplies to the most suitable uses. In other words, certain sources of water supply must be saved for the most important needs, and certain other sources must be so treated as to make them usable. Water unsatisfactory for one purpose may be or may be made quite satisfactory for another.

The present generation of engineers may not be confronted with these problems, but the students now in training will cer-

tainly meet them, and should go to them untrammeled by the practice of the past.

Leaving aside potable water, there is a demand for water for steam, for dyeing and textile manufacturing, for brewing, for chemical processes, etc. While each industry has its own peculiar requirements to be determined by the expert chemistry et the engineer, in deciding upon recommendations, is ofter required to estimate the value of water for general purposes. It is of great service to him if he is able to reject at once, to classifias good, or to put into the doubtful category the samples he is examining. If this can be done in the field or in the office, so much the better. The one essential point is that the engineer should recognize both his own limitations and those of the method he employs. A trained and experienced chemist may see more meaning in a given reaction than the ordinary observer A given test may reveal only a part of the truth, or, in unusual circumstances, it may be misleading.

But with all these risks of imperfect work, there are many occasions when a little knowledge is a wholly valuable possession so that it is worth while for the student to spend thirty hours of a series of experiments which will indicate methods of attack and may save weeks in the future.

Water taken from the deep ground is a sort of residual mothe liquor derived from years of time and miles of travel. Surfac waters are usually mixed with more or less ground water.

The evaporation of water for steam involves a concentration of whatever the feed water holds in suspension or solution, leaving in the boiler a thick mud or a coating of more or less stong scale. This is a detriment to the efficiency of the boiler as an evaporator and to its strength as well. It follows, therefore

LABORATORY NOTES

that a good water for steam production should be fairly from suspended clay and earth, from silica, and from ear precipitated iron compounds, from calcium and magnesi bicarbonates, which are precipitated on boiling, and from carbonates and sulphates, which are left as a residue evaporation.

The more friable substances may be removed to a great ext by frequent "blowing off." This involves some waste of powand involves much inconvenience. The stony substance in be, to a certain extent, converted to a friable condition by che cal reaction, loosened by kerosene, or prevented from adher by the use of organic substances. The deposition of scale not the only danger to be guarded against. Certain was attack the metals composing the boiler shell and tubes, of dissolving so much that essential parts are thereby weaker. Such waters are as uneconomical and dangerous for stemaking as are hard waters. Magnesium chloride and nitrate objectionable for this reason. For manufacturing purpositions are special requirements to be considered under each calculations.

In this short course only special methods are consider leaving out the ordinary analytical processes to be found text-books.

FIRST LABORATORY EXERCISE.

To classify the sample in hand, use the following preliminary tests. Note appearance — much or little color, turbidity, sediment, organisms, etc. — as a guide to the final conclusion.

Keep the sample well mixed without violent shaking, to insure uniformity of successive portions taken.

Examine the waters for division into general classes, as follows:

I. Scale-forming,

- (a) Friable deposits: clay and mud, bicarbonates Ca and Mg; carbonates Ca, Mg, Fe.
- (b) Stony deposits: { chiefly calcium sulphate, or iron carbonate and silica, cementing other substances.
- II. Moderate scale-forming, easily controlled,
 - (a) Natural waters, not carrying great excess of mineral substances.
 - (b) Effluents from alum or iron sulphate filters.

III. Non-scale forming, but corrosive,

- (a) Natural, soft, clear or colored waters, carrying strong acid reaction from CO₂ or "humic" acids. May be high in organic matter.
- (b) Waters carrying magnesium chloride.
- (c) Polluted waters carrying bacterial products, organic or other acids, ammonia, etc.; i.e., rivers acting as sewers.
- (d) Contaminated waters carrying chlorides, nitrates, etc.; i.e., wells and "organic matter free" effluents.

IV. In certain sections of the country another class of natural waters occur carrying sodium salts, alkaline in character. These cause foaming or priming, and illustrate the care to be taken in the use of sodium carbonate as a remedy. These waters will be indicated by a negative result in titration for permanent hardness. An excess of organic matter also often causes foaming.

Examine the three waters assigned and place them in the proper class, I, II, or III, by comparative qualitative or quantitative tests, for—total hardness, sulphates, carbonates, chlorides, color, carbon dioxide, nitrates, ammonia, and iron, by described methods. For instance, comparison with standards for color and for ammonia; by titration for carbon dioxide, and, if desirable, for organic matter; by evaporation to determine nitrates and iron.

Preliminary "Hardness" Test. 10 cc. of the water is measured into the test bottle H, and 40 cc. of distilled water added. From the soap solution burette 1 cc. is run into the bottle H (about 6 cm. wide by 12 cm. high to the shoulder), glass stoppered. The contents are well shaken, and if no foam or "lather" remains add successive portions of 1 cc. each, until a partial covering of the surface is noted; then 0.5, and, finally, 0.2 cc. at each addition, until the surface is just covered with a white foam at the end of five minutes, the bottle H lying on its side. If not more than 2 cc. of the soap solution have been used, the water contains at most about 97 parts per million of calcium and magnesium salts, and is "soft." Use Table No. II. For a closer determination of soft water make another test, using 50 cc. of the water without dilution, Class III. Use Table No. I.

If 5 cc. of the soap solution have been used, the water contains about 300 parts and is "hard," Class II. If 8 or

10 cc., 500 or 600 parts, and the water is very hard, Class I, and no further test for hardness is made. If the first foam disappears at the end of three minutes and more is required to secure a permanent (for five minutes) foam, magnesium is indicated. Much magnesium gives also a characteristic curdy scum. If no foam is permanent with 10 cc. of soap solution the water is too hard to be tested by this strength of soap solution. For double strength see Tables III and IV.

In order to gain some knowledge of the samples as an aid in future procedures, from each sample of water take two portions of about 10 cc. each; pour into two test tubes. To the first test tube add a few drops of silver nitrate, AgNO₃. Note amount and character of the resulting precipitate, then add a few drops of dilute nitric acid, HNO₃. Note the permanence or disappearance of all or a greater portion of the precipitate. Silver carbonate will be dissolved; silver chloride will not; thus both carbonates and chlorides are indicated by the same test. If only a slight milkiness remains, the sample must be concentrated (100 cc. or 250 cc. to 25 cc.) before testing for exact amount of chlorine. The water is probably Class III, but is not rigidly classified by this test.

To the second test tube add a few drops of barium chloride, BaCl₂. Note amount of precipitate, then add a few drops of dilute hydrochloric acid, HCl. If the precipitate perceptibly disappears, carbonates as well as sulphates are present. If a heavy precipitate remains, the turbidimeter may be used with the unconcentrated water, Class I. Otherwise, 200 cc. to 500 cc. are to be put on the water bath to concentrate. If there is no perceptible precipitate on standing, no further test is needed. The water is probably Class II, but is not rigidly classified by this test.

Excess of Carbon Dioxide. Class III or II, rarely I. Titrate 100 cc. of the original water to be tested in a graduated 100 cc. Nessler tube with sodium carbonate to absorb the "free" or excess CO_2 yielding sodium bicarbonate. If $\frac{n}{50}$ Na₂CO₃ is used, multiply the cc. required to produce a permanent faintly pink color by 10 to give parts per million of calcium carbonate equivalent to the excess CO_2 . If $\frac{n}{22}$ Na₂CO₃ is used, each cc. is equivalent to 0.001 gram of CO_2 .

Phenolphthalein is used as indicator, and may be added to the sodium carbonate solution when made up.

Determination of Nitrates. With a burette pipette take from each sample (clarified by milk of alumina if turbid or colored) two portions, one of 2 cc. and one of 5 cc., run into 3-inch porcelain dishes; place on the top of the water bath to evaporate for the determination of nitrates. When just dry, cool and add six drops of phenol-di-sulphonic acid. With a short bent glass rod, cause the acid to cover all the residue; add water from the automatic pipette or from a graduate to dilute the acid. Make alkaline and note color, if any. The amount of nitrates present may be estimated by matching this color with the color produced by a known amount of solution, 1 cc. = 0.000001 gram N. Select two tubes of equal diameter, thickness and shade of glass, of 50 or 100 cc. capacity. Rinse the contents of the dish into one of these and make up to the graduation with distilled water. Fill the other tube half full of distilled water made alkaline with 3 cc. KOH. Holding the tubes close together, run in standard solution from the burette with frequent rotation until the colors match. If more than 25 cc. of the standard is required, discard these solutions and evaporate 1 cc. or even ½ cc. for a new test. On the other hand, if

the color in the porcelain dish is very slight it may be matched directly, using a similar dish. The number of cc. of standard used divided by the number of cc. of sample evaporated gives the parts per million.

In the field it may be more convenient to use the Brucine method as follows: to 1 cc. of the water in a 3-inch porcelain dish add 2 cc. concentrated H₂SO₄; cool; fold a piece of solid Brucine, about the size of a B.B. shot, in a 7 cm. filter. Place the paper on the side of the dish, washing it with the solution by a rotary motion. The appearance of a bright pink color of greater or less intensity proves the presence of nitrates in greater or less amount. The yellow color which results in a few minutes may be used to compare with standards. This method will detect five parts or more of nitrates per million.

These preliminary tests will show whether the water is incrustant or corrosive, and will give an approximate idea of the quantities of each important constituent, so that in the quantitative analysis to follow, certain tests may be omitted. For instance, if silver nitrate (solution 25 grams to the liter) causes no perceptible cloudiness, it may be assumed that chlorine exists in less amount than two parts per million. If barium chloride causes no perceptible cloudiness, sulphates are so low as to be neglected for general uses.

If the water is "soft" (less than 100 parts per million), no tests for *incrustants* need be subsequently applied, but attention may be concentrated on its *corrosive* qualities.

In Class I if sulphates are predominant, additional tests will be required. Treatment with alcohol and the use of the turbidimeter as described on page 10 will probably give good results.

If the chlorides, etc., predominate, other more satisfactory tests are to be applied.



SECOND LABORATORY EXERCISE.

DETERMINATION OF AMOUNT OF SCALE-FORMING MATERIAL IN CLASS I OR CLASS II, AND OF TOTAL SOLIDS.

DETERMINATION OF IRON IN SOME CASES.

DETERMINATION OF SULPHATES BY THE TURBIDIMETER OR OTHERWISE.

Total Solids. Evaporate 100 to 200 cc. of the sample according to observed hardness to dryness on a water bath in a tared platinum dish. Dry in the oven at 100° C. or 110° C. for two hours. Waters high in chlorides absorb moisture very rapidly and dry with difficulty. Cool the dish in a sulphuric acid desiccator and weigh quickly. Use the residue for incrustants or for iron determination.

Incrustants by Non-Solution. Treat the residue three times with 60 per cent alcohol, allowing it to stand 10 to 20 minutes each time. Decant carefully after each treatment (it may be necessary to filter if a flocculent precipitate floats, the small ashless filter being held in a twisted wire and ignited over the dish). Dry the dish, cool and weigh as before. This residue gives an approximate per cent, i.e., an estimate of the non-soluble material, clay, iron, silica, or sulphate, the water will leave on evaporation.

Sulphates by Turbidimeter. The opacity is due to sulphates precipitated as barium sulphate, BaSO₄, finely divided, and remaining in suspension, unless the sulphates are present in large amount.

Operation. To 100 cc. of water add HCl sufficient to acidify (about 1 cc.) and 1-2 grams BaCl₂. Shake until dissolved. Pour slowly into the graduated tube of the turbidimeter (keep-

ing the outside perfectly dry) until the flame beneath just of appears when looking down through the liquid. Cauti

The tube must not be placed over the flame when emp Calculate, after first noting height of liquid in em., amount SO_3 , from formula $X = {0.0573 \atop y+0.1}$ where $X = {\rm amount}$ of SO_3 where SO_3 where SO_3 where SO_4 where SO_5 where SO_5 is present, SO_5 and SO_5 is present, SO_5 and SO_5 is present, or from Table No. Waters containing SO_5 operate per million read directly; less, concentrate, if more, dilute before precipitation. The most accurate readings are those obtained in the upper half the tube.

Determine grams of SO₄ from SO₃ by the ratio of molecu

weights. As molecular weight of $SO_4 = 96$, and of $SO_3 = 8$ multiply grams of SO₃ obtained by $\frac{9}{8}$ 6, or $\frac{6}{8}$, to obtain grant of SO₄. The successful use of the turbidimeter requires little practice and care in securing a steady pointed flame, a careful and frequent mixing of the solution to prevent t heavy precipitate from settling out. Sulphates may also determined by the usual gravimetric method, or by titrati with potassium chromate (Wehrenfennig, "Analysis and Softe ing of Boiler Feed Water," p. 28), as follows: Remove the bica bonates from 200 cc. of the water to be tested by boiling minutes, taking care to keep the volume by replacing the le with distilled water, to prevent the precipitation of calciu sulphate by concentration. Decant, or filter 100 cc. into graduated 150 cc. flask; add 10 to 20 cc. $\frac{n}{10}$ barium chloric according to amount of sulphate present. Heat 5 minutes as add from a burette $\frac{n}{10}$ potassium chromate until the supernata liquid shows a faint but distinct yellow. Cool, fill to the ma with distilled water, filter 100 cc. into a Nessler tube. Make blank with distilled water in a companion tube, running in from the burette sufficient potassium chromate to match the color. The difference between the number of cc. used with the sample and with the blank, multiplied by $\frac{3}{2}$, subtracted from the number of cc. of barium chloride used, multiplied by 40, gives parts per million.

THIRD LABORATORY EXERCISE.

BOILER WATERS AND WATERS FOR GENERAL USE.

Alkalinity (including "temporary hardness") comprises the carbonates and hydrates which will react with added sulphuric acid. It is frequently necessary to determine this before deciding upon treatment.

Magnesium as hydrate, set free by calcium hydrate, may be determined in the same solution.

Permanent Hardness. Calcium and magnesium sulphates which will react with added sodium or potassium carbonates or hydrates, but which is not removed without such reaction.

Alkalinity by Titration. Measure 100 cc. of the sample into a 200 cc. graduated flask and titrate with $\frac{n}{50}$ H₂SO₄ to a distinct pink, using methyl orange as an indicator. The number of cc. of acid used multiplied by 10 gives parts per million calcium carbonate corresponding to the alkalinity. This value multiplied by 1.14 gives the weight of aluminum sulphate Al₂(SO₄)₈ which the water will decompose and by 1.58 gives the weight of alum, KAl(SO₄)₂. 12 H₂O. When lacmoid is used as an indicator, measure 100 cc. into a 6-inch porcelain evaporating dish; add 0.5 cc. of lacmoid solution (2 grams in one liter of 50 per cent alcohol). Heat until nearly boiling, run in the $\frac{n}{50}$ sulphuric acid, as before, until a reddish-purple takes the place of the blue color. Heat again, and if the blue returns drop the acid cautiously into the middle of the dish, noting any change in color as the drop spreads. Read the burette for the total number of cc. used.

When heat is not desirable or available, and methyl orange is objected to, 100 cc. may be measured into a 250-cc. white glass-stoppered bottle, 2.5 cc. erythrosine solution (0.1 gm. of the sodium salt in one liter of distilled water), added together with 5 cc. of chloroform (neutral to erythrosine), and the n/50 acid run in a few drops at a time. The bottle must be shaken vigorously. The rose color should slowly disappear until a white paper held back of the bottle fails to reveal a trace of pink in the liquid above the chloroform.

For magnesium, use the already titrated sample by boiling for 15 minutes in the flask, then adding from a burette (closed circuit) 25 cc. or for waters high in magnesium 50 cc. saturated "lime water," calcium hydrate (barium hydrate is rather better), and allow to stand on the water bath or hot plate 15 minutes longer. At the end of the 15 minutes, fill to the 200 cc. mark with neutral boiled distilled water, mix and filter quickly into a graduated cylinder. Reject the first 30 or 40 cc. (used to wash the filter paper and to heat the cylinder). Titrate the next 100 cc. with n/50 H₂SO₄, using methyl orange as indicator. Since with the most rapid and careful manipulation a certain carbonation of the "lime water" may occur, a blank is put through all the operations including filtration with the same number of cc. of the calcium hydroxide (if several samples are done at the same time, one blank will serve). The difference between the acid used for the blank and for the sample is the number of cc. which would have been used up by the lime water which has entered into combination with the acid radical and driven out the magnesium as hydrate, a flocculent precipitate.

Note. — The varying solubility of magnesium hydrate in presence of certain mineral salts introduces an undetermined error. The error caused by expansion of the liquid is in most cases less than the error of manipulation of the method.

Because only 100 of the original 200 cc. is used, multiply by 20 the cc. of acid used to obtain the parts per million of calcium carbonate equivalent to the magnesium in the sample. The ratio CaCO₂: Mg::100:24.18 will give parts per million Mg.

The whole operation should not occupy more than forty-five minutes, including the two fifteen-minute periods of heating.

To Determine Magnesium by Soap Titration. To 100 cc. of water found to contain magnesium add 0.1 gram powdered ammonium oxalate and .1 gram ammonium chloride. Shake until dissolved and filter. Test 50 cc. with the soap solution. The calcium should have been removed as oxalate.

For Permanent Hardness (incrustants par excellence). Used only when $CaSO_4$ is over 200 parts per million. Boil in a porcelain dish 250 cc. of the water. Add 25 cc. of n/10 "soda reagent" (made of equal parts of sodium hydroxide and sodium carbonate. This mixture is especially for magnesium waters), and boil for 10 minutes. For waters which show a hardness by the soap test of over 400 parts per million use n/2 soda reagent. Filter, and while hot make up with boiling distilled water to 250 cc. (neutral alcohol in place of the water diminishes the solubility of $CaSO_4$); mix and titrate 100 cc. with n/50 H₂SO₄, using methyl orange as indicator.

Make a blank, using boiling distilled water instead of the sample. The difference gives the cc. "soda reagent" used up by the permanent hardness. This number of cc. multiplied by ten gives the parts per million of calcium carbonate corresponding to permanent hardness, CaCO₈: CaSO₄::100:138. If the water shows excess of "soda reagent" over the blank, it contains sodium or potassium carbonate, and the number of cc. multiplied by 10 gives parts per million of calcium carbonate equivalent to the sodium carbonate present.

FOURTH LABORATORY EXERCISE.

WATER FOR DYEING, TEXTILE MANUFACTURING, LAUNDRY, ETC.

Color is usually due to organic matter of a peaty nature or to iron in solution. Either substance is objectionable for many processes in textile industry, in pharmaceutical preparation, in laundry work, etc.

Color derived from peaty or humus sources is related very intimately to oxygen consumed and to albuminoid ammonia.

The vellowish-brown tint of the surface waters of the Atlantic watershed corresponds, except in the lowest grades, very closely to that of nesslerized ammonia, so that the standards for reading ammonia can be used also for the determination of the color. The comparison is made in the same kind of 50-cc. tubes that are used for the ammonia determinations, but the tubes used for this purpose are kept separate from those used for the ammonia, since the least amount of alkali remaining in a tube (from imperfect washing, for instance) alters the color of the water. The scale used corresponds quite closely with the amount of the standard ammonium chloride solution in the standards. Thus a color of 1.0 is nearly the same as that produced by the nesslerization of 1 cc. of the standard ammonia; 0.1 is about the color produced with 0.1 cc. of the ammonia solution. In the higher grades of color, above 1.0 or 2.0, the tint varies considerably from that of the nesslerized ammonia, and the degree of color is then better determined in wider tubes and in less depth.

The degree of correspondence of the ammonia standards with the natural waters is dependent largely upon the sensitiveness of the Nessler's reagent, a solution so sensitive as to precipitate in two hours, matching the colors more closely than one which will remain for twenty-four hours. This is perhaps due to the reddish tinge given to the solution by the incipient precipitation of the mercuric iodide.

Turbidity, after twelve hours standing, and sediment must be distinguished. Sediment is easily disposed of in a sedimentation tank, a simple and economical adjunct to a manufacturing plant.

Turbidity, whether due to clay, to sewage pollution, or to swarms of micro-organisms, usually requires treatment for removal. The most common agents of clarification are aluminum or iron sulphates.

Turbidity may be determined by comparison with silica standard made from finely ground, washed and ignited diatomous earth. The results are expressed in parts per million of silica, to compare with the standards.

Suspended matters are sometimes determined by the difference in weight of total solids filtered through paper and of the unfiltered sample. Sometimes they are collected on the asbestos filter prepared in a Gooch crucible. Sometimes a centrifuge is used for approximate quantity. The student is referred to "Standard Methods" and works on sewage analysis for further details.

Determination of Iron. If not used for incrustants, the residue from total solids determination is treated with 5 cc. HCl (I-I), warming if solution is not immediate. Wash out into a 100 cc. Nessler tube with distilled water to the 50 cc. mark. Oxidize the possible ferrous compounds to ferric by a few drops of potassium permanganate. The pink color should persist 5 minutes. Make up a blank with 50 cc. distilled water

and 1 cc. HCl (I–I). To the sample prepared as above and to the blank add 15 cc. potassium sulphocyanate, KCyS. Place in a good light. To the blank add from a finely graduated 1-cc. pipette, standard iron solution one-tenth cc. at a time, rotating the tube to mix each time, until the red color matches the color of the sample. The standard iron contains 0.00001 gram Fe in 1 cc.

Manganese is not infrequently present unsuspected. A brown color, not iron, is often noticed in dissolving residue on evaporation in HCl. This color is very often due to manganese, which may be tested for in the residue on evaporation by means of the borax bead.

Oxygen Consumed (Absorbed).

All waters when strongly acidulated with sulphuric acid and digested with a little potassium permanganate absorb from this salt more or less oxygen, the amount of which can be determined if the amount of available oxygen in the permanganate added is known and the amount left after the action of the water is determined. The difference gives the oxygen absorbed by the substances dissolved in the water. Some very pure waters absorb very little indeed, less than 0.1 mg. per liter, while others containing organic matter in solution absorb many times this amount. Although, strictly speaking, an index neither to the quantity nor quality of the organic matter, yet, as the amount absorbed varies in different waters, being usually very small in pure waters and comparatively large in impure waters, the determination is not without value. Certain inorganic substances occasionally found in waters also reduce permanganates, such as nitrites, ferrous salts, and sulphides. These act on the permanganate with rapidity, while the organic matter acts very slowly. When any of these substances are present, two determinations are generally made, one to ascertain the amount of oxygen absorbed by the inorganic matter, and the other to estimate the total absorbed oxygen, and the difference is taken as being the amount consumed by the organic matter. The total oxygen consumed varies greatly in the same water, the chief factors being time and temperature; but the degree of acidity and the intensity of the light are not unimportant. For results to be comparable, therefore, they must have been obtained by identical processes.

Oxygen Consumed: Quick Method. Measure into a 150-cc. flask 25, 50 or 100 cc. of the water to be tested. Add 10 cc. sulphuric acid (1:3). Add from a burette 8 to 15 cc. of the standardized permanganate. Bring to a boil, and boil two minutes. Cool one minute; add from a burette 10 cc. (or more if this amount does not decolorize the solution) of ammonium oxalate. Titrate with the permanganate to a faint pink. The difference between the total amount used and that given by a blank determination gives the oxygen consumed.

Oxygen Consumed: Dr. Thresh's Method. Apparatus and reagents required: Standard solution of potassium permanganate, 1 cc. = .1 mg. available oxygen. Solution of sodium thiosulphate, 1 gram to the liter. Solutions of potassium iodide and of starch. Solution of sulphuric acid, 25 per cent. Stoppered bottles or flasks holding about 400 cc. Burettes, pipettes, etc. Two hundred and fifty cc. of water to be examined heated to 98° F. are measured into one of the bottles or flasks, which should have been previously cleaned with acid, etc. To this are added 10 cc. of the solution of potassium permanganate and 10 cc. of the sulphuric acid, and the stopper being

inserted the bottle is placed in an incubator kept at about 98° F. Let it remain there for three hours, examining it from time to time to see that a decided pink color remains. If the color tends to disappear, add a second 10 cc. of permanganate solution, as this should always be present in marked excess. While this is incubating, place 250 cc. of the recently distilled water in a second flask, add 10 cc. of the acid, 10 cc. of the permanganate, and 1 cc. of 5 per cent potassium iodide solution, using starch as an indicator. The amount of the solution used corresponds to 1 mg. of available oxygen, or to 10 cc. of the permanganate solution. The thiosulphate solution not keeping well, this standardization should be repeated with every fresh batch of waters or every few days. On no account should the thiosulphate solution be made with a water containing nitrates, for, if so, nitrites will be formed and vitiate the experiment.

The water, after the lapse of three hours, is removed from the incubator, and quickly reduced to the room temperature by immersing the bottle in cold water. The iodide is then added, and the excess of permanganate estimated. In this determination it is most important to cool the water, as the amount of thiosulphate required to destroy the blue color of the iodide of starch is markedly affected by the temperature. This is another of the causes, not generally recognized, of the differences in the amount of oxygen absorbed found by different analysts when examining the same water. If it is desired to estimate the oxygen absorbed by the inorganic matter, the water may be warmed to 98° F., and the unreduced permanganate estimated. In examining potable waters this determination is rarely required.

FIFTH LABORATORY EXERCISE.

WATERS USED IN VARIOUS CHEMICAL MANUFACTORIES, BREWING, SODA WATER, FOR MEDICINAL PREPARATIONS, ETC.

A preliminary sanitary analysis is often necessary, sometimes essential, in addition to the mineral analysis for these uses.

Formerly little attention was paid to organic impurities in water supplies for bottling purposes. Now it is recognized that many medicinal preparations made from herbs and roots demand a water with the highest solvent power — a "soft" water capable of taking up the organic matters readily and yet one that will remain sterile when bottled. Oftentimes these two factors prove difficult of attainment in one and the same water.

Some extracts are better made with a calcium carbonate water which gives a less highly colored extract. For preparing some dilute chemical preparations, only distilled water is suitable, but water distilled from a contaminated water may contain ammonia and other volatile compounds. These are not harmful in themselves, but hardly improve the waters. No general rule as to quality can be given for so varied requirements.

Therefore a preliminary "sanitary" outline may be carried through as an aid to discrimination between several samples and as a test which may lead to the rejection of an unsuitable sample at once.

The simple qualitative tests given on page 6 are supplemented by like tests for ammonia with Nessler reagent. If ammonia is indicated, it will probably be best to make a distillation, and since this is the longest process, it is well to begin this at once.

For the Determination of Free and Albuminoid Ammonia. Free the flask and condensing apparatus by distilling water until there is no test with Nessler reagent. Empty the flask, and without rinsing measure into it 100 cc. of badly polluted waters, or 500 cc. of ordinary quality. If a smaller quantity is used, make up to 500 cc. with ammonia-free water. If the water has an acid reaction, neutralize by sodium carbonate before distilling. Collect 3 portions of 50 cc. each; allow the flask to cool ten minutes, and add 40 cc. alkaline permanganate through a funnel to prevent the least drop from touching the neck of the flask whence it would contaminate the cork or rubber stopper. Watch until boiling has fairly set in to prevent foaming or bumping, lest the stopper be touched by spatters. Collect 3 or 4 portions of 50 cc. each as before. When all are ready prepare standards or use permanent ones. Nesslerize with 1 cc. of the reagent and compare with standards. The first three tubes give the ammonia readily disengaged, "free ammonia," and the last set that which has to be broken out of combination, so to speak, from as yet undecomposed organic matter, "albuminoid ammonia."

The sum of the number of cc. of standard used to match the different tubes, multiplied by 0.02, gives parts per million free or albuminoid ammonia as the case may be, providing 500 cc. of water was used.

Without distillation the student may sometimes mistake the yellow color given by the potassium hydrate of the Nessler with iron for the mercur-ammonium compound indicating ammonia.

Nitrites with ammonia indicate active pollution and therefore a probable corrosive action.*

Procedure. To 100 cc. of sample in a Nessler tube add 10 cc. each of sulphanilic acid and naphthylamine acetate. Allow to stand ten minutes and compare color with standard papers.

^{*} For nitrates see page 7.

Determination of Chlorine. The chlorine is determined in natural waters by the method in general use, namely, titration with a solution of silver nitrate, using potassium chromate as an indicator. Since the exact change of color which constitutes the end-point will vary with the sensitiveness of the eyes of different observers to red, each person should standardize the silver nitrate solution for himself. To do this, measure into a six-inch porcelain dish 25 cc. of distilled water; add 5 cc. of sodium chloride solution (1 cc. = 0.001 gram Cl) from the burette and three drops of potassium chromate solution. Titrate with the silver nitrate solution until the yellow color of the liquid assumes the faintest tinge of reddish brown.

Waters which are high in chlorine, i.e., which contain 20 or more parts per million, are titrated directly using 25 cc. either with or without the addition of 5 cc. of the salt solution. Waters which are low in chlorine are concentrated before titration, 250 cc. being evaporated to 25 cc. on the water bath. Brown surface-waters should be decolorized as follows: Pour into a 750-cc. flat-bottomed flask about 500 cc. of the water. Add 3 cc. of the milk of alumina; shake and heat the water quickly to boiling on an iron plate. When the liquid comes to a full boil, at once remove the flask from the plate to avoid loss by evaporation. Place it in an inclined position to allow the alumina to settle. Decant off 250 cc. of the colorless water into a six-inch dish for concentration to 25 cc., using a flask calibrated for both the hot and the cold solution. making the titration, rub down the sides of the dish above the liquid with a small quantity of distilled water free from chlorine, using a clean feather. Rinsing alone will not always dissolve the chlorides which adhere to the sides of the dish.

For titration by this method the solution must be as nearly neutral as possible. If the water is alkaline to any extent, it should be neutralized with dilute sulphuric acid, using phenolphthalein as an indicator. The solution will then contain alkali only as bicarbonate, which does not interfere with the titration. Acid water must be made neutral by the addition of sodium carbonate.

Oxygen Dissolved.

Collect a sample of the water in a calibrated bottle of about 250 or 300 cc., taking care that no air is inclosed. This can be most readily done by allowing water to flow into the bottom of the bottle by means of a piece of rubber tubing attached to glass running through the neck. Then allow the water to overflow for some minutes, at the same time noting the temperature of the water.

Procedure for Oxygen Dissolved. Remove the stopper from the bottle and add approximately 2 cc. of the manganous sulphate solution and 2 cc. of the sodium hydrate-potassium iodide solution, delivering both of these solutions beneath the surface of the liquid by means of a pipette. Replace the stopper and mix the contents of the bottle by shaking. Allow the precipitate to settle. Remove the stopper, add about 2 c.c. of sulphuric acid and mix thoroughly. Up to this point the procedure may be carried on in the field, but after the sulphuric acid has been added and the stopper replaced there is no further change, and the rest of the operation may be conducted at leisure. For accurate work there are a number of corrections necessary to take into account, but in actual practice it is seldom necessary to take note of them, as they are

ordinarily much less than the errors of sampling. Rinse the contents of the bottle into a flask, titrate with $\frac{N}{40}$ solution of sodium thiosulphate, using a few cc. of the starch solution towards the end of the titration. Do not add the starch until the color has become a faint yellow; titrate until the blue color disappears.

Calculation of Results (taken from Standard Methods). The standard method of expressing results shall be by parts per million of oxygen by weight.

"It is sometimes convenient to know the number of cc. of the gas per liter of 0° C. temperature and 760 mm. pressure, and also to know the percentage which the amount of gas present is, of the maximum amount capable of being dissolved by distilled water at the same temperature and pressure. All three methods of calculation are therefore here given:

Oxygen in parts per million =
$$\frac{0.0002 N \times 1,000,000}{V} = \frac{200 N}{V}$$

Oxygen in cc. per liter
$$= \frac{0.1395 N \times 1000}{V} = \frac{139.5 N}{V}.$$

Oxygen in per cent of saturation =
$$\frac{200 N \times 100}{V \times O} = \frac{20,000 N}{VO}$$
.

Where
$$N = \text{number of cc. of } \frac{N}{40}$$
 thiosulphate solution,

- V = capacity of the bottle in cc. less the volume of the manganous sulphate and potassium iodide solution added (i.e., less 4 cc.).
- O = the amount of oxygen in parts per million in water saturated at the same temperature and pressure."
 (See Table A.)

TABLE A.

QUANTITIES OF DISSOLVED OXYGEN IN PARTS PER MILLION BY WEIGHT IN WATER SATURATED WITH AIR AT THE TEMPERATURE GIVEN.

Temp. C.	Oxygen.	Temp.	Oxygen.	Temp. C.	Oxygen.	Temp. C.	Oxygen.
0 1 2 3 4 5 6 7	14.70 14.28 13.88 13.50 13.14 12.80	8 9 10 11 12 13 14 15	11.86 11.58 11.31 11.05 10.80 10.57 10.35 10.14	16 17 18. 19 20 21 22 23	9.94 9.75 9.56 9.37 9.19 9.01 8.84 8.67	24 25 26 27 28 29 30	8.51 8.35 8.19 8.03 7.88 7.74 7.60

Bacteriological Examination.

In examining waters for some uses the bacterial count is desirable, although for those enumerated above small numbers will be eliminated by the process of preparation. Distinctly "bad" waters will be more quickly tested by chemical means. Nitrites are an indication of change, and stability is desirable in waters for the above needs.

SIXTH LABORATORY EXERCISE.

EXAMINATION OF WATERS WITH ESPECIAL REFERENCE TO THEIR ACTION ON METALLIC OR OTHER CARRIERS AND CONTAINERS, SUCH AS PIPES, TANKS, COILS, EVAPORATING PANS, BOTTLE CLOSERS, ETC.

The solvent power of water is so great that no known substance is really insoluble. This solvent power is increased for some metals by salts already in solution, by certain qualities in metals, lack of homogeneity, etc., electrical action, etc. On the other hand some substances are more soluble in distilled water, or in water carrying gases.

Some metallic salts are poisonous, as lead acetate; some are cumulative poisons, as lead salts. Some are quickly eliminated, as most arsenic and antimony salts.

Most metallic compounds derived from conduits and containers are objectionable in the delicate operations of dyeing, of color printing, of silk washing, of making white paper, etc.

In the preparation of medicinal or pharmaceutical preparations the presence of even harmless metallic compounds would be disastrous. Water containing iron would give an inky appearance to Dr. Xy's medicine which carries tannin, while the presence of zinc in the water with which Herr Z's tonic was made would give a cloudy appearance not attractive.

Not only the result on the fluid is to be considered; the pipe or container suffers as well. The pitting of boilers is only one case. Block-tin pipes standing in water carrying high nitrates become honeycombed. Galvanized-iron pipes soon leak. Alum solutions rot the pipes.

Not only expense of renewal but also the contamination is to be considered.

Action on Metals. For class illustration it will be sufficient to use freshly polished specimens of the common metals, lead, copper, brass, iron and steel of different grades. These placed singly in sufficient water to cover them an inch deep in tubes or in filled stoppered bottles (the size and number being somewhat regulated by the amount of water at hand), may be observed hour by hour and at the end of 12 and 24 hours. The water after filtration may be tested by appropriate methods.

The following tests modified from those given in Thresh's book will serve most conveniently.

Lead. Decant into a test tube 5 to 50 cc. of the water in which the metal has been standing; add .1 to 1 cc. of acetic acid I-I; mix, and with a capillary tube or a glass rod add "a droplet" of calcium sulphide (see Reagents, p. 42). Note carefully against a white background, holding tube with operator's back to the light. The white sulphur separates out on contact with the acid solution and turns dark, or if much lead be present, black. If the first addition shows nothing, make a second or third under the same careful observation.

To make this and the following tests quantitative, measure the original solution accurately into wide Nessler tubes and determine by means of standard solutions.

This test will detect 1 part lead in 10,000,000 of water. By passing hydrogen sulphide gas through the solution a considerably greater delicacy has been obtained, or the water may be concentrated, after the addition of nitric acid, subsequent neutralization with KOH, and acidification with acetic acid (which does not decompose H₂S as does nitric acid), and the test made as before.

Lead sulphide is black even in small quantity, copper sulphide is copper brown, and therefore if either is present alone it may be detected, but if both are present in the same sample the one color obscures the other. The mixed sulphide may be oxidized by a drop of strong nitric acid, lead precipitated by a drop of sulphuric acid and ammonia added to alkalinity. If a trace of copper be present a characteristic blue color is produced.

Copper. Decant as before, add .1 to 1 cc. (according to the amount of water used) of H₂SO₄ (1:4), mix, add .1 to 1 cc. of a freshly made potassium ferrocyanide solution.

A copper-brown color indicates the presence of copper, which may be quantitatively determined by means of standards. Lead does not interfere, but iron, if present, must be removed by precipitation with ammonium hydrate and the filtrate acidified and tested.

Zinc. Decant and treat precisely as in the test for copper. A white turbidity or milkiness indicates the presence of zinc, becoming opaque white if the zinc is abundant. A dilution which shows turbidity only may be matched with standard solutions.


Considerable quantities of copper or iron interfere and must be removed.

Iron. Decant and acidify as before, but oxidize the ferrous iron to ferric by adding potassium permanganate (reagent) until a distinct pink color remains for two minutes, then add the ferrocyanide.

A blue color indicates the presence of iron, and its depth is proportional to the quantity of iron, which may be determined by means of standards.

If zinc is present, the turbidity may interfere with accuracy.

Sometimes the gases dissolved in the water are the active agents, and the water may be bettered by previous heating as in the case of bicarbonates in boiler waters, of hydrogen sulphide in some spring waters and of free carbon dioxide in others. The latter has been already referred to, page 7. Methods for the collection and determination of these will be found in Hempel's gas analysis, translation by Dennis.

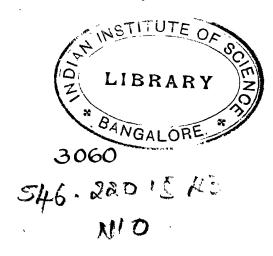

SEVENTH LABORATORY EXERCISE.

If a sample is found to be muddy or colored it is to be clarified before using for fine manufacturing.

If a sample shows signs of pollution, i.e., ammonia nitrites, etc., it must not be used raw for any domestic purpose.

If hardness is over fifty parts per million it will be expensive to use in laundry work or fine textile industries.

Waters most seriously objectionable for use in boilers are apt to contain the following substances:

Substances which form scale:

Calcium sulphate.

Magnesium and calcium carbonates.

Soluble salts: oxides of iron, silica, and aluminum.

Clay and sand.

Organic matter as cementing material.

Substances which corrode boilers:

Acids, both mineral and organic.

Magnesium chloride.

Substances which cause priming:

Sodium and magnesium carbonates. Alkalies.

Certain organic matter.

Remedies for the defects found in waters are both general and specific. "Hard" waters are softened by removal of the calcium salts by precipitation and filtration. Any inexpensive substance that will accomplish this without rendering the water too corrosive is a "remedy." Treat 100 cc. of the sample with a known quantity of the substance chosen, "soda ash," sodium carbonate, tri-sodium phosphate, sodium fluoride, etc. After the reaction is complete (it is usually hastened by heat,

when the original volume must be made up by distilled water), filter 50 cc. and test for hardness, etc.

After treatment, determine if the action of the water on metals has been increased or diminished.

Class II may require very careful study to determine whether frequent blowing off and greater care are not cheaper than reagents. If only two or three fillings of the boilers can be used before wasting it ought to be cheaper to set up a water-softening plant.

Class III frequently needs treatment from another reason,—accumulation of sludge, foaming or priming, corrosion or need of removal of color and turbidity for manufacturing. The latter is usually accomplished by a substance like alum, which, decomposed in the water by some alkaline substance, forms a gelatinous drag net and carries down, if allowed to settle out, the objectionable clay and color as well as germs. The waters which show sufficient alkalinity to decompose alum cake, aluminum sulphate, may be tested for the lowest limit of alum which will do the work, because each grain per gallon of anything added to water makes an expense which soon becomes prohibitive. For this reason laboratory tests for remedies are at best only indicative of the general direction in which to work, and they serve as a preventive of serious mistakes and as time savers in suggestion of means.

Patent "boiler compounds" are not to be recommended. Analyses of the scale formed in any given case will often give light. See scheme at end of book.

Pitting is probably largely due to inequalities in the composition of the metal. Studies on these lines are in progress.

A preliminary test frequently useful is the behavior of the sample on simple heating and on heating with "correctives" such as "soda ash" or sodium phosphate. Heat to boiling

on the iron plate about 50 cc. in a small Erlenmeyer flask. Note if precipitation occurs indicating escape of excess of CO_2 , or if foaming occurs as concentration takes place. Add a little sodium carbonate in powder (soda ash). Note if sulphates precipitate $CaSO_4 + Na_2CO_3 = CaCO_3 + Na_2SO_4$. To the boiling sample add tri-sodium phosphate. Note precipitate. $CaCO_3 + H_1 + HO_1 + CO_2 = Ca (HCO_3)_2$. Primary or acid calcium carbonate is formed when normal carbonate is dissolved in water containing carbon dioxide. It cannot be isolated, and it decomposes at boiling temperature. $CaCO_3$ is precipitated and CO_2 escapes.

A statement was made in the Railroad Gazette, March 23 and 30, 1900, that outside of New England and some parts of the Middle South there are very few places where pure soft water can be obtained for locomotive boilers: "In the former localities boilers are found to be in good condition after twenty-five to thirty years' continuous service, while in bad water regions most of the boiler parts have to be renewed every five years or oftener. From statistics gathered the estimate is made that each locomotive using bad water is an expense of \$750 annually. The only way to prevent incrustation and corrosion is to purify the water before it enters the boiler: any process or method by which water free from these impurities can be delivered to the locomotive at less expense than fifty cents per one thousand gallons will be an advantageous arrangement."

This illustrates only one phase of the modern problem of securing the right quality of water for a given use.

MINERAL WATERS.

Notes on Mineral or Medicinal Waters.

From the hydrotheology of the earliest human records, through hydromythology of the early Greeks to the balneotherapy of the middle ages, water flowing from hidden springs, carrying more or less mineral or gaseous substances, has had a large share of both medical and priestly attention.

As chemistry became a science of weights and measures it looked askance at most of the values claimed for such dilute solutions as water.

It is only with the rise of physical chemistry that hydrotherapeutics is beginning to attract the attention of investigators.

The presence of radium in many springs, the effect of ionization on chemical reactions, the differences of electrical conductivity, with degrees of ionization, all point to a possible revival of the oldest cult known—the water cult or hydrology.

It will probably develop most scientifically along the lines of physical and electrical chemistry, but already an "industry" is in full swing in supplying the world with a traditional remedy for any ill flesh is heir to, and for furnishing a drinking water supposed to be germ-free because it is brought direct from the spring in a bottle.

The only excuse for including notes on mineral water in a treatise on industrial water analysis is the fact that the commerce has developed to such an extent that it is not probable that any considerable proportion of the millions of gallons sold is bottled at the supposed source that is implied on t

It is a simple matter to repeat the

important constituents chemically analyzed. But the radium, the infinitesimal quantities of undiscovered elements perhaps, to which it may well be that the specific value is due, are absent.

But in modern life cleanness and correct labeling are taking a share of the industrial and sanitary chemist's time.

It is also believed that certain general considerations should be at the service of the physician who is liable to take a given mineral water at any seller's valuation unless warned, and who may unwittingly prescribe a compound he would studiously avoid in any other connection. The mineral content varies from 2 to 22 thousand parts per million, usually about ten thousand, made up of ten to twenty different substances. One or two may be in excess, giving name to a class as alkaline like Carlsbad which carries 1793 parts per million sodium (Na) or Pullowna with 5222 Na . 344 K. This is a sulphate and chloride water, 21154 SO, and 1913 Cl.

The earlier classification holds good for general tests. The author is of opinion that a water bad for boilers or metal pipes is not good for the human machine.

REFERENCE BOOKS ON MINERAL WATERS.

- 3. Geschichte der Balneologie, Hydroposie und Pegologie

Dr. B. M. Lersch Würzburg, 1863.

 Mineral Waters of the United States: U. S. Dept. of Agric., Bureau of Chemistry, Bull. 91, 1905. J. K. Haywood and B. H. Smith.

PART II.

STANDARD SOLUTIONS.

"Standard" Solutions are made of any convenient value, provided it is known. Thus it is convenient to have a salt solution of one milligram, 0.001 gram per cc. instead of a normal or even a tenth normal $\frac{n}{10}$ NaCl. If the value is known it is standard whether normal or not. C. P. chemicals are used.

The molecular weight of NaCl is 23 + 35.5, and *Normal* solution would contain 58.5 grams per liter, or 0.058 per cc., and of chlorine 0.0355, which is 35 times too much for use in this case, therefore $\frac{58}{35.5} = 1.648$ grams per liter are weighed out to give a value to 1 cc. of 0.001 gram Cl, a *Standard* solution.

The molecular weight of sulphuric acid, H_2SO_4 , is 2+32+64=98, but a normal solution is one containing one hydrogen equivalent, therefore a normal sulphuric acid solution contains 49 grams H_2SO_4 in the liter. $\frac{n}{10} \cdot \frac{n}{50}$ or any desired strength is made by the suitable dilution. But for the determination of excess of carbon dioxide a standard solution of $\frac{n}{22}$ is used to give a direct reading of 1 cc. = 0.001 CO₂. Sulphuric acid, H_2SO_4 , 98 grams, unites with Na_2CO_3 , 106 grams, or displaces 12 + 32 = 44 CO₂. Since it is twice the normal, 22 grams of CO_2 are to be used. The calculation is 1 cc. = 0.022 · $\frac{n}{22}$ =

1 cc.
$$\frac{n}{22}$$
 H₂SO₄ = 0.001 gram CO₂.

Standard solutions are used not only with indicators to show when the desired reaction is completed, but also to produce colors which may be used in comparison with those in solutions of which the value is to be determined.

There are many substances the quantity of which may be estimated by the depth of color they give to the water in which they are dissolved. Picric acid and potassium chromate, for instance, dissolve with a characteristic color which is deeper the more of the substance present.

The quantitative determination is always made by the use of standard solutions explained above in which known quantities under comparable conditions are matched in color with the unknown. This method of estimating quantities of dissolved substances is of the greatest use in water analysis where the amounts are usually so small as to necessitate the evaporation of large volumes to secure a workable concentration. The earlier practice required weeks of time and gallons of water to perform an analysis which may now be completed with equal or greater accuracy in a few hours, using a few centimeters of water.

Substances liable to change during prolonged heating may now be determined in a few moments. Only spectroscopic methods exceed in delicacy some of the well-known colorimetric tests; for instance, by Nessler's reagent the ten-thousandth of a per cent of ammonia may be detected; a thousandth of a per cent of nitrite may be determined in ten minutes. In both these cases, the substances are so liable to change that the concentration of large amounts of solution would be impossible.

The apparatus required for colorimetric tests is usually very simple, easily carried and cleaned. Some tests, however, require

expensive instruments of precision called tintometers or colorimeters. These may save in time what they cost in money.

There are several limiting conditions to the use of colorimetric methods which must be clearly understood at the outset.

The depth of color given by a definite quantity of a substance is sometimes affected by temperature, as in the case of the ammonia determination, or by the presence of other substances, as in the nitrite test.

One of the most remarkable changes occurs with the dissociation of many substances on reaching a certain degree of dilution. The ions of many substances have a different color from the compound. Thus copper sulphate changes from blue to green on dilution; the mercur-ammonium from red to yellow. The dilution used is often, in fact usually, such that a mixture of colors results. From this it is seen at once that the standard used must be quite comparable in all respects.

The manner in which the light strikes the solution, the kind and thickness of glass used to contain it, the color of surrounding objects, all have an influence on the tint of color seen, and therefore all these must be the same for the standard and for the unknown solution. Moreover, since color is a subjective phenomenon due to the action of light on the eye itself, no two individuals see precisely the same color effect in the same substance, or can describe accurately what they see.

This fact makes the use of so-called *permanent* standards of less value for use by different persons than standards in gravimetric tests.

In cases where no great degree of accuracy is demanded, as in the determination of nitrites in water (time and the surrounding atmosphere affect the result greatly), standard papers may be used advantageously. Colored glass is extensively employed for comparison, and only its expense prevents a wider use. Some metallic compounds keep the color and bear dilution sufficiently well to be used, but the student should know how to prepare standards for himself from comparable solutions, and should bear in mind the limits as above noted, and should watch for others which may occur, thus finding his personal equation in color work. There is a decided choice as to which depth of color may be compared with the greatest accuracy; for instance, that given by 1 to 3 cc. of standard ammonium chloride solution is more easily differentiated than a color given by 8 to 12 cc., and the color given by 5 cc. of standard nitrate in 10 cc. volume is more easily matched than a deeper color. As a rule, the lighter shades are preferred. The dilution is made before the reaction is brought about, in most cases, by accurately graduated measuring vessels with complete mixing of the liquids.

A few substances will dilute proportionately after the color is produced, as picric acid in the nitrate test, but the color produced by Nessler reagent in the ammonia test will not so dilute. Most of the colors change on standing, and therefore the test is carried out at once.

Many solutions do not retain their strength in the light, or in presence of organic matter, or because of molecular decomposition, as potassium permanganate, silver nitrate, sodium thiosulphate; such solutions need frequent standardization; for example, sodium thiosulphate in the determination of dissolved oxygen is standardized by potassium bichromate solution: $K_2Cr_2O_7 + 14$ HCl + 6 KI = 8 KCl + 2 CrCl₃ + 7 H₂O + 6 I. The molecular weight is therefore six times the "normal" based on hydrogen = 1.

49.07 grams is the weight for a liter "normal" bichromate and will yield $\frac{48}{6} = 8.000$ grams of oxygen. $\frac{1}{40}$ normal will

yield 0.200 gram O and 1 cc. (1000 cc. to the liter) will yield 0.0002 gram or 0.1395 cc. of oxygen at 0° C. and 760 mm.

Oxygen 16: Iodine 127::0.0002:0.0016 x.

 $\frac{1}{40}$ normal thiosulphate (6.2 grams to the liter) should also give 0.0002 gram oxygen per cc. if of standard strength. To test it: Measure out 10 cc. of the bichromate from a burette pipette into a flask. Add 3 cc. KI, 3 cc. strong HCl, 100 of water, and shake two or three minutes. Titrate the liberated iodine with the thiosulphate to be tested. Note how much weaker or stronger it is and use the correction in the calculation.

The keeping qualities of the thiosulphate solution are improved by adding to each liter 5 cc. of chloroform and 1.5 grams of ammonium carbonate before making up to the prescribed volume.

Oxygen Dissolved.

Standard thiosulphate 1 cc. = 0.0002 gram oxygen. Standard bichromate, see above.

Reagents:

- (1) Manganous sulphate solution, 48 grams MnSO₄ in 100 cc. distilled water.
- (2) Sol. of NaOH and KI. Dissolve 360 grams NaOH and 100 grams KI in 1 liter of distilled water.

Hardness.

Standard Soap Solution. Dissolve 100 grams of the best white castile soap in a liter of 80 per cent alcohol. Dissolve 75–100 cc. of this in about a liter of 70 per cent alcohol, or until 14.25 cc. of it give the required lather with 50 cc. of standard calcium chloride solution.

Standard CaCl₂ Solution. Dissolve 0.2 gram pure Iceland spar or CaCO₃ in dilute HCl. Evaporate to dryness several times to remove excess of acid. Dissolve in 1 liter of water.

Nitrates.

Standard Nitrate Solution. Dissolve 0.720 gram pure recrystallized KNO $_3$ in 1 liter of water. Evaporate 10 cc. of this cautiously on water bath. Moisten quickly and thoroughly with 2 cc. of phenol-disulphonic acid and dilute to 1 liter. 1 cc. = 0.000001 gram N.

Reagent.

Phenol-disulphonic Acid. Heat together 3 grams synthetic phenol with 37 grams pure concentrated H₂SO₄ in a boiling water bath for 6 hours.

Brucine and concentrated H₂SO₄.

Iron.

Standard Iron Solution. Dissolve 0.86 gram of ferric ammonium alum in 500 cc. of water, add 5 cc. HNO₃ (Sp. Gr. 1.20) and dilute to 1 liter. 1 cc. = .00001 gram Fe.

Reagents.

Potassium Sulphocyanate. 5 grams per liter.

Potassium Permanganate. 5 grams per liter.

Magnesium.

Saturated Lime Water. Shake 1 part of freshly slaked lime with 20 parts of distilled water for 20 minutes and let solution stand over night. Keep in bottle with closed circuit.

Nitrites.

- 1. Standard Milton Bradley papers VR. tint I equals .000001 gram N, in a one and one-eighth-inch Nessler tube filled to the 100 cc. mark. VR. tint 2 corresponds to .0000005 gram N.
- 2. Sulphanilic Acid. Dissolve 3.3 grams sulphanilic acid in 750 cc. of water by aid of heat; add 250 cc. glacial acetic acid.
- 3. Naphthylamine Acetate. Boil 0.5 gram of α naphthylamine in 100 cc. of water for 5 minutes. Filter through a plug of

washed absorbent cotton. Add 250 cc. glacial acetic acid and dilute to 1 liter.

Chlorine.

- 1. Standard Salt Solution. Dissolve 16.48 grams of fused NaCl in 1 liter of distilled water. Dilute 100 cc. of this to 1 liter for standard. 1 cc. = 0.001 gram Cl.
- 2. Standard Silver Nitrate. Dissolve about 2.42 grams AgNO₃ (dry crystals) in 1 liter of distilled water. 1 cc. = 0.0005 gram Cl approximately. Standardize against the NaCl solution.
- 3. Potassium Chromate Indicator. Dissolve 50 grams of neutral potassium chromate in a little distilled water. Add enough silver nitrate to produce a slight red precipitate. Filter and make up the filtrate to one liter with distilled water free from chlorine.

Oxygen Consumed.

- 1. Dilute Sulphuric Acid. One part sulphuric acid to three parts of distilled water. This should be freed from oxidizable matters by adding potassium permanganate until a faint pink color persists after standing several hours.
- 2. Standard Potassium Permanganate Solution. Dissolve 0.4 gram of the crystalline compound in 1 liter of distilled water. Standardize against an ammonium oxalate solution. One cc. is equivalent to 0.0001 gram of available oxygen.
- 3. Standard Ammonium Oxalate Solution. Dissolve 0.888 gram of the substance in one liter of distilled water. 1 cc. is equivalent to 0.0001 gram of oxygen.

Free and Albuminoid Ammonia.

1. Standard Ammonia Solution. Dissolve 3.8215 grams C.P. NH₄Cl in a liter of water, free from ammonia. This is the strong solution from which the standard solution is made by diluting 10 cc. to a liter with ammonia-free water. One cc. of the standard solution = .00001 gram N.

- 2. Alkaline Permanganate. Dissolve 233 grams of the best stick potash in 350 cc. of distilled water. Filter this strong solution, if necessary, through a layer of glass wool on a porcelain filter plate. Dilute with 700 to 750 cc. of distilled water to a sp. gr. of 1.125, add 8 grams of potassium permanganate crystals, and boil down to one liter to free the solution from nitrogen. Each new lot of reagent must be tested before being used, but when the chemicals used are all good there should be no correction needed for ammonia in the solution.
- 3. Nessler's Reagent. Dissolve 50 grams potassium iodide in a minimum quantity of cold water. Add a saturated solution of mercuric chloride until a slight but permanent red precipitate persists; add 400 cc. of 50 per cent solution of potassium hydrate, made from only the purest of material. This solution should give the required color with ammonia within five minutes after addition, and should not precipitate with small amounts of ammonia within two hours.
- 4. Ammonia-free Water. Redistill distilled water from alkaline potassium permanganate.

Reagents for Metals.

Solution of Ca sulphide.

Sulphur in fine powder	
Slaked lime	20 grams.
Distilled water	500 cc.

Boil until about 400 cc. remain.

The solution should have a rich orange-red color; when this fades the solution has become useless.

Solution of Potassium Ferro-Cyanide. Dissolve a clear yellow crystal as large as a large pea in 25 cc. of distilled water.

This solution does not keep, and must be made up fresh on the day it is to be used.

COMPUTATION OF HYPOTHETICAL COMBINATIONS FROM ANALYSES.

The business man always asks for the compound known to him in other relations to be reported from a water analysis. This is not often possible with any degree of exactness in the limitation of our present knowledge. In the case of medicinal water, which was the earliest form of analysis, the combination of the mineral substances was doubtless of particular consequence.

SAMPLE REPORT.

RESERVOIR WATER FROM CYPRESS, ILLINOIS, AUGUST 1 TO 30, 1906.

!	Parts per	Hypothetical Con	nbinations.	
Ions.	Million.	Ions.	Parts per Million.	Grains per Gallon.
Turbidity Susp. solids Potassium and K Sodium(Na) Magnesium(Mg) Calcium(Ca) Iron(Fe) Aluminum(Al) Silica(SiO ₂) Bases + Si(SiO ₂ +) Nitrates(NO ₃) Chloride(Cl) Sulphate(SO ₄) Carbonate(HCO ₃).	146. 58.1 142.8 18.7 10.2 25.6 .8 .5 8.8 .8 .8 .8 .8 .9 .9	Sod. nitrate (NaNO ₃). Sod. chloride (NaCl) Sod. sulphate (Na ₂ SO ₄) Mag. carb (MgCO ₃). Cal. carb (CaCO ₃). Iron carb (FeCo ₃). Alumina (Al ₂ O ₃) Silica (SiO ₂). Bases (SiO ₂ +).	63.9	.06 .65 2.50 2.05 3.70 .10 .05 .52 .05

For industrial use it is usually of less importance, and the author deprecates the waste of time spent on elaborate calcu-

lations. The public soon learns to take results and interpret them as given. The student should, however, understand the rules of such combinations based chiefly on solubilities in the presence or absence of other salts.

At various stages of chemical knowledge, results have been reported in various ways. Just now the U.S. Geological Survey has set the fashion of reporting in ions as shown in the example given.

To the engineer and inspector a knowledge of the foregoing methods is especially desirable.

The composition of the rocks and soils affects the amount and kind of dissolved substances found in water in any given locality, and the distance from the sea affects the normal chlorine which in the interior has been found within 1 part per million when not affected by salt deposits or by *pollution*.

Some idea of the composition of the water found in different parts of the world is useful as an indication of what the engineer may expect to encounter.

The water taken by man for his use is that which is on its way to the ocean. He takes it in various concentrations from rain caught before it reaches the ground to the brines leaching out salt deposits. The kind of rock and soil through which water percolates or over which it flows modifies and controls the amount of solid matter it carries in solution as it flows on its course. The following are instances of such modification. There are regions where no good water is available. The examples given, except perhaps the Dead Sea, have all been used for industrial purposes, sea water not unfrequently so.

PERCENTAGE COMPOSITION OF SALINITY IN VARIOUS WATERS.

TAKEN FROM U. S. G. S. BULLETIN 330.

	A	В	С	D	E	F
=			ł			
CO_3	51.65	34.74	59.03	.20	trace	40.02
SO ₄	1.05	14.90	.88	7.89	.31	21.73
Cl	.48	6.23	. 59	55.11	65.81	.64
NO_3		1.57				1
Ca	22.94	20.42	15.25	1.23	4.73	23.25
Mg	4.09	5.21	10.71	3.65	13.28	5.82
Na	5.14	4.92	6.68	30.64	11.65	1.81
K	1.75	4.65	2.24	1.09	1.85	2.04
SiO_2	9.40	6.77	2.97		trace	4.01
Fe_2O_3	1.49	.15	1.65			
Al_2O_3	2.01	.44				0.58
4-3						_
Total per						
cent	100.00	100.00	100.00	100.00	100.00	100.00
Alkalinity,	1					
parts per						
million	195	166	144	38,789	192,150	563
				, ,	′ 1	

- A. Mississippi River at Minneapolis.
- B. Mississippi River above New Orleans.
- C. Mille Lacs Lake.
- D. Mediterranean (mid-sea).
- E. Dead Sea surface at north end.
- F. Virginia Hot Springs, Virginia.

TABLE I.

TABLE OF HARDNESS, SHOWING THE PARTS OF CALCIUM CARBONATE (CaCO₃) IN 1,000,000 FOR EACH TENTH OF A CUBIC CENTIMETER OF WEAK SOAP SOLUTION USED.

Using 50 cc. of the sample.

Soap Solution, cc.	0.0 cc.	0.1 cc.	0.2 cc.	0.3 cc.	0.4 cc.	0.5 cc.	0.6 cc.	0.7 cc.	0.8 cc.	0.9 cc.
0.0 1.0 2.0 3.0 4.0 5.0 7.0 8.0 9.0 11.0 12.0 13.0 14.0	4.8 19.5 32.5 45.7 60.0 74.3 88.6 103.0 118.0 133.1 148.4 164.3 180.2 196.0 211.9	75.7 90.0 104.5 119.5 134.6 150.0 165.9 181.7	7.9 22.1 35.1 48.6 62.9 77.1 91.4 106.0 121.1 136.1 151.6 167.5 183.3 2215.1	9.5 23.4 50.0 64.3 78.6 9107.5 1122.6 1137.6 1153.2 1169.0 1184.9 200.8 216.8	154.8	125.6 140.6 156.3 172.2 188.1	40.3 54.3 68.6 82.9 97.1 112.0	84.3 98.6 113.5 128.6 143.7	1.6 16.9.9 42.9 57.1 71.4 85.7 100.0 130.1 145.2 161.1 177.0 192.9 208.7 225.2	3.2 18.2 31.2 44.3 58.6 72.9 87.1 101.5 116.5 131.6 146.8 162.7 178.6 194.4 210.3 226.9

TABLE II.

TABLE OF HARDNESS, SHOWING THE PARTS OF CaCO₃ IN 1,000,000 FOR EACH TENTH OF A CUBIC CENTIMETER OF WEAK SOAP SOLUTION USED.

Using 10 cc. of sample of water plus 40 cc, distilled water,

Soup Solution, cc.	0.0 cc.	0.1 cc.	0.2 cc.	0.3 cc.	0.4 cc.	0.5 ce.	0.6 cc.	0.7 cc.	0.8 cc.	0.9 cc.
0.0 1.0 2.0 3.0 4.0 5.0 7.0 8.0 9.0 11.0 12.0 13.0 14.0	24.0 97.5 162.5 228.5 300.0 371.5 443.0 590.0 665.5 742.0 821.5 901.0 980.0 1059.5	169.0 235.5 307.0 378.5 450.0 522.5 597.6 673.0 750.0 829.5 908.5 988.0	110.5 175.5 243.0 314.5 385.5 457.0 605.5 680.5 758.0 916.5 996.0	117.0 182.0 250.0 321.5 393.0 464.5 537.5 613.0 688.0 766.0 924.5 1004.0	123.5 188.5 257.0 328.5 400.0 471.5 545.0 620.5 695.5 774.0 932.5 1012.0	130.0 195.0 264.5 335.5 407.0 478.5 552.5 628.0 703.0 781.5 940.5 1020.0	136.5 201.5 271.5 343.0 414.5 485.5 560.0 635.5 710.5 789.0 948.5 1028.0	143.0 208.0 278.5 350.0 421.5 493.0 567.5 643.0 718.5 797.5 877.0 856.5 1035.5	149.5 214.5 285.5 357.0 428.5 500.0 575.0 650.5 726.0 805.5 885.0 964.5 1043.5	91.0 156.0 221.5 293.0 364.5 435.5 507.5 582.5 734.0 813.0 972.0 1051.5
		l	ı	1	ı		i	l	i	

TABLE III.

TABLE OF HARDNESS, SHOWING THE PARTS OF $CaCO_3$ IN 1,000,000 FOR EACH TENTH OF A CUBIC CENTIMETER OF STRONG SOAP SOLUTION USED.

Using 50 cc. of sample.

Soap Solution, ec.	0.0 cc.	0.1 cc.	0.2 cc.	0.3 cc.	0.4 cc.	0.5 cc.	0.6 cc.	0.7 cc.	0.8 cc.	0.9 cc.
0.0 1.0 2.0 3.0 4.0 5.0 6.0 7.0	19.5 45.7 74.3 103.0 133.1 164.3 196.0	106.0 136.1 167.5	80.0 109.0 139.1 170.6	54.3 82.9 112.0 142.1 173.8	1.6 29.9 57.1 85.7 115.0 145.2 177.0 208.7	4.8 32.5 60.0 88.6 118.0 148.4 180.2 211.9	7.9 35.1 62.9 91.4 121.1 151.6 183.3 215.1	11.1 37.7 65.7 94.3 124.1 154.8 186.5 218.5	14.3 40.3 68.6 97.1 127.1 157.9 189.7 221.8	16.9 42.9 71.4 100.0 130.1 161.1 192.9 225.2

TABLE IV.

TABLE OF HARDNESS, SHOWING THE PARTS OF CaCO₃ IN 1,000,000 FOR EACH TENTH OF A CUBIC CENTIMETER OF STRONG SOAP SOLUTION USED.

Using 10 cc. of sample of water plus 40 cc. distilled water.

Soap Solution, cc.	0.0 cc.	0.1 cc.	0.2 cc.	0.3 cc.	0.4 cc.	0.5 cc.	0.6 cc.	0.7 cc.	0.8 cc.	0.9 cc.
0.0 1.0 2.0 3.0 4.0 5.0 6.0 7.0	97.5 228.5 371.5 515.0 665.5 821.5 980.0	243.0 385.5 530.0 680.5	257.0 400.0 545.0 695.5 853.0	271.5 414.5 560.0 710.5	149.5 285.5 428.5 575.0 726.0	162.5 300.0 443.0 590.0 742.0	175.5 314.5 451.0 605.5 758.0 916.5	188.5 328.5 471.5 620.5 774.0 932.5	201.5 343.0 485.5 635.5 789.5	214.5 357.0 500.0 650.5 805.5 964.5

Jour. Am. Chem. Soc., 1901, 799.

TABLE V.

TABLE FOR THE PHOTOMETRIC DETERMINATION OF SULPHURIC ACID.

Depth	SO ₃	Depth in cm.	SO ₃	Depth	SO ₃	Depth	SO ₃
in	Parts per		Parts per	in	Parts per	in	Parts per
cm.	Million.		Million.	cm.	Million.	cm.	Million.
1.0 1.1 1.2 1.3 1.45 1.6 1.7 1.8 2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.9 3.1 3.3 3.4 3.5 3.6 3.6 3.6 3.6 3.6 3.6 3.6 3.6 3.6 3.6	522. 478. 442. 410. 383. 359. 338. 319. 302. 287. 273. 261. 250. 239. 230. 221. 213. 205. 198. 191. 185. 179. 173. 168. 164. 159. 155.	4.1.2.3.4.5.6.7.8.9.0.1.2.3.4.4.5.5.5.5.5.5.5.5.5.5.6.6.6.6.6.6.7	140. 137. 133. 131. 128. 125. 122. 119. 117. 115. 113. 110. 106. 104. 103. 101. 99. 97. 96. 94. 93. 91. 90. 88. 87. 86. 84.	7.12345677.89012334567899.1238.88.88.999.1239.567	81. 80. 79. 78. 77. 76. 75. 74. 73. 72. 71. 70. 68. 68. 65. 64. 63. 62. 62. 62. 60. 59. 59.	10.0 10.2 10.4 10.6 11.0 11.2 11.4 11.6 12.2 12.4 12.8 13.0 14.5 14.5 15.0 16.5 17.0 17.5 18.0 19.0	57. 55. 55. 53. 51. 50. 49. 47. 46. 45. 42. 41. 38. 37. 36. 35. 31. 32. 31. 30.
3.8	147.	6.8	83.	9.8	58.	19.5	29.
3.9	144.	6.9	82.		57.	20.0	29.

J. I. D. Hinds. Journal Am. Chem. Soc., 18, 661, and 22, 269.

TABLE VI.

FOR THE CONVERSION OF PARTS PER 1,000,000 INTO GRAINS PER GALLON,
AND VICE VERSA: ALSO, FOR COMPARING DEGREES
OF HARDNESS.

-			De	grees of Hardne	ess.
Parts in 1,000,000.	Grains in U.S. Stan- dard Gallon.	Grains in Imperial Gallon.	French: Parts CaCO ₃ in 1,000,000.	English: Grains CaCO ₃ in Imperial Gallon.	German: Parts CaO in 1,000,000.
1 2 3 4 5 6 7 8	.0584 .1167 .1751 .2335 .2919 .3502 .4086 .4670 .5254	.07 .14 .21 .29 .35 .42 .49 .56	1 2 3 4 5 6 7 8 9	.07 .14 .21 .28 .35 .42 .49 .56	0.6 1.1 1.7 2.2 2.8 3.4 3.9 4.5 5.0
17.131 34.262 51.393 68.524 85.655 102.786 119.917 137.048 154.179	1 2 3 4 5 6 7 8	1.1992 2.3893 3.5975 4.7967 5.9958 7.1950 8.3942 9.5934 10.7925	14. 29. 43. 67. 71. 86. 100. 114. 128.	1 2 3 4 5 6 7 8	08. 16. 24. 32. 40. 48. 56. 64.
14.286 28.571 42.857 57.143 71.428 85.714 100.000 114.286 128.571	0.8339 1.6678 2.5017 3.3356 4.1695 5.0033 5.8372 6.6711 7.5050	1 2 3 4 5 6 7 8 9	1.8 3.6 5.4 7.1 9.0 10.7 12.6 14.3 16.1	.12 .25 .38 .50 .63 .75 .88 1.00	1 2 3 4 5 6 7 8 9

Water Supply, Chemical and Sanitary. William Ripley Nichols. 1880.

TABLE VII.

	Specific Gravity at 15° C.	Per cent Strength.
H ₂ SO ₄ (Oil of vitriol) Sulphuric acid	1.84 1.82 1.73 1.61 1.39	100 90 80 70 50
HCl (Hydrochloric acid)	1.20 1.18 1.12 1.10	40.7 36.7 24.4 20.8

By weight:

	Specific Gravity at 20° C.
50 per cent alcohol	.914 .892 .868 .844 .818

50 per cent is made from 100 cc. of 95 per cent alcohol + 90 cc. water.
60 per cent is made from 100 cc. of 95 per cent alcohol + 70 cc. water.
50 per cent is made from 100 cc. of 90 per cent alcohol + 84.7 cc. water.
60 per cent is made from 100 cc. of 90 per cent alcohol + 53.6 cc. water.

TABLE VIII.

QUANTITY OF PURE REAGENTS REQUIRED TO REMOVE ONE POUND OF INCRUSTING OR CORROSIVE MATTER FROM THE WATER.

Incrusting of Corrosive Substance held in Solution.	Amount of Reagent. (Pure.)	Foaming Matter Increased.
Sulphuric acid Free carbonic acid Calcium carbonate Calcium sulphate Calcium sulphate Calcium rate Magnesium carbonate Magnesium sulphate Magnesium chloride Magnesium nitrate	0.57 lb. lime plus 1.08 lb. soda ash 1.27 lb. lime 0.36 lb. lime 0.78 lb. soda ash 0.96 lb. soda ash 1.33 lb. lime 0.47 lb. lime plus 0.88 lb. soda ash 0.59 lb. lime plus 1.11 lb. soda ash 0.38 lb. lime plus 0.72 lb. soda ash	1.45 lb. None None 1.04 lb. 1.05 lb. 1.04 lb. None 1.18 lb. 1.22 lb.
Calcium carbonate Magnesium carbonate Magnesium sulphate Calcium sulphate	1.71 lb. barium hydrate 4.05 lb. barium hydrate 1.42 lb. barium hydrate	None None None None

In precipitating the calcium sulphate, there would be also precipitated 0.74 pound of calcium carbonate or 0.31 pound of magnesium carbonate, the 1.26 pounds barium hydrate performing the work of 0.41 pound of lime and 0.78 pound of soda ash; or for reacting either on magnesium or calcium sulphate, 1 pound of barium hydrate performs the work of 0.33 pound of lime plus 0.62 pound of soda ash, and the lime treatment can be correspondingly reduced.—Report of Committee on Water Service of the American Railway Engineering and Maintenance of Way Association, Eng. Record, April 20, 1907.

TABLE IX.

INTERNATIONAL ATOMIC WEIGHTS FOR 1910.

(From Journal of the American Chemical Society, Vol. XXXII, No. 1.)

SCHEME FOR TESTING BOILER SCALE.

Drop several small fragments of the boiler scale into dilute (1:2) hydrochloric acid.

A brisk effervescence shows that the scale is largely composed of Calcium Carbonate (Limestone). After the action of the acid has nearly ceased, heat the acid and scale.

A deep yellow color and further giving off of gas indicates Iron Carbonate.

After the action of the acid on the scale has ceased, dilute and pour off some of the clear liquid into

The residue is the Silica (sand) and the Clayey matter.

another test tube.

To the clear liquid add a few drops of Barium Chloride Solution.

A white powder or precipitate indicates Sulphates.

Solution = Soluble Chlorides.

CONVENIENT DATA.

- 1 boiler horsepower is computed as requiring 30 pounds of water per hour.
- 1 indicated horsepower requires, in large condensing engines, about 13 U.S. gallons of water evaporated per hour.
- 1 indicated horsepower requires, in small non-condensing engines, frequently as much as 7 to 8 gallons of water evaporated per hour.
- 1 pound of coal will evaporate 1 gallon of water in an ordinary boiler.
- 1000 gallons of water of 143 parts per million CaCO₃ degrees hardness deposit 1.4 pound scale in a boiler.

SOME USEFUL REFERENCES.

- Value of Pure Water. By George C. Whipple. Published by John Wiley & Sons. New York.
- The Filtration of Public Water Supplies. By Allen Hazen. Published by John Wiley & Sons. New York.
- Report of the Commission on Additional Water Supply for the City of New York, Appendix VI.
- Water Supply. By William P. Mason. Published by Wiley & Sons. New York.
- Report of Committee on Standard Methods of Water Analyses, to the Laboratory Section of the American Public Health Association. (Reprinted from the Journal of Infectious Diseases, Supplement No. 1, May, 1905.)
- Eng. Record, Feb. 16 and Apr. 20, 1907. 114 Liberty St., New York.
- Department of Interior, U.S. Geological Survey:
 - Underground Water Papers: Water Supply and Irrigation Paper No. 160, by Myron L. Fuller. (See list of Underground Water papers at the end.)
 - Field Assay of Water, No. 151, by Marshall O. Leighton. (See list of Water Supply and Irrigation papers.)
- The Corrosion of Iron. By W. R. Whitney. Reprinted from the Journal of the American Chemical Society. Vol. 25, p. 394.

 Also by W. H. Walker. Vol. 29, p. 1251.
- Traite de L'Epuration des Eaux Naturelles et Industrielles. By E. Delhotel. Published by Baudry & Cie. Editeurs.
- Chemistry 16 A Course for Engineering Students. By S. W. Parr. Published by the University of Illinois.
- Water and Its Purification. By S. Rideal, D.Sc. Published by J. B. Lippin-cott Co. Philadelphia.
- The Analysis and Softening of Boiler Feed Water. By Wehrenfennig, translated by D. W. Patterson. Published by John Wiley & Sons. New York.
- Engine Room Chemistry. By Augustus H. Gill. Hill Publishing Co. New York.
- The Examination of Waters and Water Supplies. J. C. Thresh. II. & A. Churchill, London.
- U. S. G. S. Bulletin No. 330. Frank Wigglesworth Clarke.
- U. S. G. S. Series of Water Supply Papers.
- U. S. Dept. of Agriculture. Office of Public Roads. Bull. No. 30.






													PA	GE
Action on metals														28
Alkalinity														12
Ammonia														21
Atomic weights														52
Bacteriological exam														25
Brucine test														8
Calcium carbonate .														12
Calcium sulphate														14
Carbon dioxide														7
Chlorine														22
Copper														28
Corrosion														8
Hardness										5.	1	2.	14.	33
Incrustants														14
Iron													9.	16
Lead													•	27
Magnesium														14
Manganese														17
Metals														28
Mineral waters														33
Nitrates														7
Nitrites														21
Oxygen consumed .														18
Oxygen dissolved .														
Pitting														26
Radium														33
Reagents			•	.*	:		•						39-	

56				IV	ות	E.A								
													_	AGE
Remedies										•				30
Sanitary analysis													22	2-23
Sediment														16
Standard solutions													35	-4 2
Sulphates													ç)–11
Total solids														g
Turbidimeter														10
Turbidity														16
Zina														28





SHORT-TITLE CATALOGUE

OF THE

PUBLICATIONS

ЭF

JOHN WILEY & SONS

NEW YORK

LONDON: CHAPMAN & HALL, LIMITED

ARRANGED UNDER SUBJECTS

Descriptive circulars sent on application. Books marked with an asterisk (*) are sold at net prices only. All books are bound in cloth unless otherwise stated.

AGRICULTURE-HORTICULTURE-FORESTRY.

Armsby's Principles of Animal Nutrition	\$4	00
Part I. Propagation, Culture, and Improvement12mo,	1	50
Part II. Systematic Pomology	_	50
Elliott's Engineering for Land Drainage	_	50
Practical Farm Drainage. (Second Edition, Rewritten)12mo,		50
Graves's Forest Mensuration		00
Green's Principles of American Forestry		50
Grotenfelt's Principles of Modern Dairy Practice. (Woll.)12mo,	_	00
* Herrick's Denatured or Industrial Alcohol8vo.		00
Kemp and Waugh's Landscape Gardening. (New Edition, Rewritten. In	*	O
Preparation).		
* McKay and Larsen's Principles and Practice of Butter-making8vo,		50
	_	50
Maynard's Landscape Gardening as Applied to Home Decoration 12mo,		50
Sanderson's Insects Injurious to Staple Crops	1	<i>5</i> 0
Sanderson and Headlee's Insects Injurious to Garden Crops. (In Prep-		
aration).		05
* Schwarz's Longleaf Pine in Virgin Forests		25
Stockbridge's Rocks and Soils8vo,		50
Winton's Microscopy of Vegetable Foods8vo,		50
Woll's Handbook for Farmers and Dairymen16mo,	1	5 0
ARCHITECTURE.		
Baldwin's Steam Heating for Buildings12mo,	9	50
Berg's Buildings and Structures of American Railroads4to,		00
Birkmire's Architectural Iron and Steel		50
Compound Riveted Girders as Applied in Buildings8vo,		00
Planning and Construction of American Theatres8vo.		00
Planning and Construction of High Office Buildings		50
Skeleton Construction in Buildings8vo,	3	00

Briggs's Modern American School Buildings8vo,	\$4	00
Byrne's Inspection of Materials and Wormanship Employed in Construction.	•-	••
	9	00
16mo,		-
Carpenter's Heating and Ventilating of Buildings8vo.		00
* Corthell's Allowable Pressure on Deep Foundations	1	25
Fieitag's Architectural Engineering8vo,	3	50
Fireproofing of Steel Buildings8vo,	2	50
Gerhard's Guide to Senitary Inspections (Fourth Edition Entirely Re-	_	••
Gerhard's Guide to Sanitary Inspections. (Fourth Edition, Entirely Revised and Enlarged)		F0
vised and Emarged)		50
* Modern Baths and Bath Houses8vo,		00
Sanitation of Public Buildings12mo,	1	5 0
Theatre Fires and Panics	1	50
Johnson's Statics by Algebraic and Graphic Methods8vo,	2	00
Kellaway's How to Lay Out Suburban Home Grounds8vo,		00
Kidder's Architects' and Builders' Pocket-book16mo, mor.,		
Ridder's Architects and Builders Focket-book		00
Merrill's Stones for Building and Decoration8vo,		00
Monekton's Stair-building4to,	4	00
Patton's Practical Treatise on Foundations8vo,	5	00
Peabody's Naval Architecture8vo,	7	50
Rice's Concrete-block Manufacture8vo,		00
Richey's Handbook for Superintendents of Construction 16mo, mor.		00
Building Foreman's Pocket Book and Ready Reference 16mo, mor.	b	00
* Building Mechanics' Ready Reference Series:		
* Carpenters' and Woodworkers' Edition16mo, mor.	1	50
* Cement Workers' and Plasterers' Edition16mo, mor.	1	50
* Plumbers', Steam-Fitters', and Tinners' Edition16mo, mor.		50
* Stone- and Brick-masons' Edition16mo, mor.		50
C-Li-1 II Deleting Dick-masons Datton		00
Sabin's House Painting	_	
Siebert and Biggin's Modern Stone-cutting and Masonry8vo,		50
Snow's Principal Species of Wood8vo,		50
Towne's Locks and Builders' Hardware16mo, mor.	3	00
Wait's Engineering and Architectural Jurisprudence8vo,	6	00
	6	50
Sheep, Law of Contracts8vo,	3	
Law of Operations Preliminary to Construction in Engineering and Archi-	J	UU
	_	~~
tecture8vo,		00
Sheep,		50
Wilson's Air Conditioning	1	50
Worcester and Atkinson's Small Hospitals, Establishment and Maintenance,		
Suggestions for Hospital Architecture, with Plans for a Small Hospital		
12mo.	1	25
ARMY AND NAVY.		
Bernadou's Smokeless Powder, Nitro-cellulose, and the Theory of the Cellulose		
Molecule		mΛ
Chase's Art of Pattern Making		50
Chase's Art of Pattern Making		50
Screw Propellers and Marine Propulsion8vo.	3	00
* Cloke's Enlisted Specialists' Examiner8vo,	2	00
*Gunner's Examiner8vo.	1	50
Craig's Azimuth4to.	3	
Crehore and Squier's Polarizing Photo-chronograph8vo,	3	
* Davis's Elements of Law8vo.		
* Tractice on the Military I am of Halted States	2	00
* Treatise on the Military Law of United States8vo,	7	
* Treatise on the Military Law of United States	7 2	00
* Treatise on the Military Law of United States	7 2	00 50
* Treatise on the Military Law of United States	7 2	50
* Treatise on the Military Law of United States	7 2 2 5	50 00
* Treatise on the Military Law of United States	7 2 2 5 3	50 00 00
* Treatise on the Military Law of United States	7 2 2 5 3 4	50 00 00 00
* Treatise on the Military Law of United States	7225342	50 00 00 00 00
* Treatise on the Military Law of United States	7 2 2 5 3 4 2 1	50 00 00 00 00 00
* Treatise on the Military Law of United States	722534211	50 00 00 00 00 00 50
* Treatise on the Military Law of United States	7 2 2 5 3 4 2 1	50 00 00 00 00 00
* Treatise on the Military Law of United States	7225342114	50 00 00 00 00 00 50
* Treatise on the Military Law of United States	7225342114	50 00 00 00 00 00 00 50
* Treatise on the Military Law of United States	7225342114	50 00 00 00 00 00 00 50

* Ludlow's Logarithmic and Trigonometric Tables	\$1 00 7 50 1 50 2 00 4 00 7 50 2 50 2 50 2 50 5 00 1 50 50 3 00 1 50
ASSAYING.	
Betts's Lead Refining by Electrolysis	4 00
Furman and Pardoe's Manual of Practical Assaying. (Sixth Edition, Revised and Enlarged). 8vo, Lodge's Notes on Assaying and Metallurgical Laboratory Experiments. 8vo, Low's Technical Methods of Ore Analysis. 8vo, Miller's Cyanide Process. 12mo, Manual of Assaying. 12mo, Minet's Production of Aluminum and its Industrial Use. (Waldo.). 12mo, O'Driscoll's Notes on the Treatment of Gold Ores. 8vo, Ricketts and Miller's Notes on Assaying. 8vo, Robine and Lenglen's Cyanide Industry. (Le Clerc.). 8vo, Ulke's Modern Electrolytic Copper Refining. 8vo, Wilson's Chlorination Process. 12mo, Cyanide Processes. 12mo, Cyanide Processes. 12mo,	1 50 3 00 3 00 1 00 1 00 2 50 2 00 3 00 4 00 3 00 1 50
ASIRONOMI.	
Comstock's Field Astronomy for Engineers	2 50 3 50 3 00 4 00 3 00 1 00 2 50 3 00 5 00 2 00
CHEMISTRY.	
* Abderhalden's Physiological Chemistry in Thirty Lectures. (Hall and Defren)	5 00 1 25 3 00 3 00 4 00 3 50 3 00 3 00

Austen's Notes for Chemical Students	\$1	50
Baskerville's Chemical Elements. (In Preparation). Bernadou's Smokeless Powder—Nitro-cellulose, and Theory of the Cellulose.		
Molecule	2	50
Biltz's Introduction to Inorganic Chemistry. (Hall and Phelan). (In Press)		
Laboratory Methods of Inorganic Chemistry. (Hall and Blanchard). 8vo.	3	00
* Blanchard's Synthetic Inorganic Chemistry	ĩ	00
* Browning's Introduction to the Rarer Elements Svo.	1	50
*Claassen's Reet-sugar Manufacture. (Hall and Rolle) 8vo,	3	00
	3	00
Classen's Quantitative Chemical Analysis by Electrolysis (Boltwood) 7cd. Cohn's Indicators and Test-papers	_	00
* Danneel's Electrochemistry (Merriam.)	i	25
Dannerth's Methods of Textile Chemistry		00
Danhert's Methods of Textile Chemistry. (Burgess). Swo. Effront's Enzymes and their Applications. (Presectt.). Svo. Eissler's Modern High Explosives		00
Effront's Enzymes and their Applications. (Presentt.)	4	00
Erdmann's Introduction to Chemical Preparations (Dunlap)12mo,	1	25
# Fischer's Physiology of Alimentation. (Dunlap)	2	00
Fletcher's Practical Instructions in Quantitative Assaying with the Blowpipe.		
12mo, mor.		50 00
Fowler's Sewage Works Analyses	_	00
	. 0	()()
Quantitative Chemical Analysis. (Cohn.) 2 vols8vo,	12	50
Manual of Qualitative Chemical Analysis. Fart I. Descriptive. (Wells.) ovo Quantitative Chemical Analysis. (Cohn.) 2 vols		
Fuertes's Water and Public Health	1	50
Furman and Pardoe's Manual of Practical Assaying. (Sixth Edition,	3	00
* Getman's Exercises in Physical Chemistry		00
Gill's Gas and Fuel Analysis for Engineers	1	25
* Gooch and Browning's Outlines of Qualitative Chemical Analysis.		
Grotenfelt's Principles of Modern Dairy Practice. (Woll.)12mo,	1 2	25 00
Groth's Introduction to Chemical Crystallography (Marshall) 12mo,		25
Hammarsten's Text-book of Physiological Chemistry. (Mandel.)8vo.		00
Hanausek's Microscopy of Technical Products. (Winton.)8vo,		()()
		00 50
Hering's Ready Reference Tables (Conversion Factors)16mo, mor. *Herrick's Denatured or Industrial Alcohol8vo,		00
Hinds's Inorganic Chemistry8vo,		00
* Laboratory Manual for Students	1	00
* Holleman's Laboratory Manual of Organic Chemistry for Beginners.		
(Walker)		00 50
Text-book of Organic Chemistry. (Walker and Mott.)		50
Text-book of Organic Chemistry. (Walker and Mott.)	3	00
Holley and Ladd's Analysis of Mixed Paints, Color Pigments, and Varnishes.		
Hopkins's Oil-chemists' Handbook8vo,		50 00
Jackson's Directions for Laboratory Work in Physiological Chemistry8vo,		25
Johnson's Rapid Methods for the Chemical Analysis of Special Steels, Steel-	•	
making Alloys and GraphiteLarge 12mo.		(00)
Landauer's Spectrum Analysis. (Tingle.)	3	00
ucts, Animal Products, and Natural Waters	9	00
Lassar-Cohn's Application of Some General Reactions to Investigations in	-	
Organic Chemistry. (Tingle.)12mo,	1	00
Leach's Inspection and Analysis of Food with Special Reference to State	~	***
Control	7	50 00
Lodge's Notes on Assaying and Metallurgical Laboratory Experiments8vo,		00
Low's Technical Method of Ore Analysis8vo,		00
Lunge's Techno-chemical Analysis. (Cohn.)		00
* McKay and Larsen's Principles and Practice of Butter-making8vo,		50
Maire's Modern Pigments and their Vehicles12mo,	Z	00

Mandel's Handbook for Bio-chemical Laboratory	\$1	50
12mo,		
Mason's Examination of Water. (Chemical and Bacteriological.)12mo,	1	25
Water-supply. (Considered Principally from a Sanitary Standpoint.)		00
8vo, * Mathewson's First Principles of Chemical Theory8vo,		00
Matthewson's First Principles of Chemical Theory		50
Textile Fibres. 2d Edition, Rewritten		00
* Meyer's Determination of Radicles in Carbon Compounds. (Tingle.)	-	
Third Edition12mo.	1	25
Third Edition	1	00
Manual of Assaying		00
Minet's Production of Aluminum and its Industrial Usc. (Waldo) .12mo, Mixter's Elementary Text-book of Chemistry		50
Mixter's Elementary Text-book of Chemistry	1	
Morgan's Elements of Physical Chemistry		00
Outline of the Theory of Solutions and its Results		00 50
Morse's Calculations used in Cane-sugar Factories16mo, mor.		50
* Muir's History of Chemical Theories and Laws		00
Mulliken's General Method for the Identification of Pure Organic Compounds	-	
Vol. I. Compounds of Carbon with Hydrogen and Oxygen. Large 8vo,	5	00
Vol. II. Nitrogenous Compounds. (In Preparation).		
Vol. III. The Commercial Dyestuffs. (In Press).		
O'Driscoll's Notes on the Treatment of Gold Ores		00
Ostwald's Conversations on Chemistry. Part One. (Ramsey.) 12m2, Part Two. (Turnbull.) 12m2,		50
Part Two. (Turnbull.) 12mo,		00
Owen and Standage's Dyeing and Cleaning of Textile Fabrics 12mo,		00
* Palmer's Practical Test Book of Chemistry		25
Penfield's Tables of Minerals, Including the Use of Minerals and Statistics		~0
of Domestic Production 8vo	1	00
Pictet's Alkaloids and their Chemical Constitution. (Biddle.)8vo,		00
Pictet's Alkaloids and their Chemical Constitution. (Biddle.)		00
Prescott and Winslow's Elements of Water Bacteriology, with Special Refer-		
ence to Sanitary Water Analysis		50
* Reisig's Guide to Piece-Dyeing8vo,	25	00
Richards and Woodman's Air, Water, and Food from a Sanitary Stand- point	n	00
Ricketts and Miller's Notes on Assaying		00
Rideal's Disinfection and the Preservation of Food		00
Sewage and the Bacterial Purification of Sewage		00
Rigg's Elementary Manual for the Chemical Laboratory8vo,		25
Robine and Lenglen's Cyanide Industry. (Le Clerc.)	4	00
Ruddiman's Incompatibilities in Prescriptions8vo,		00
Whys in Pharmacy12mo,	1	00
Ruer's Elements of Metallography. (Mathewson). (In Press.)		00
Sabin's Industrial and Artistic Technology of Paint and Varnish8vo,	2	00 50
Salkowski's Physiological and Pathological Chemistry. (Orndorff.)8vo, Schimpf's Essentials of Volumetric Analysis		25
Manual of Volumetric Analysis. (Fifth Edition, Rewritten)8vo,		00
* Qualitative Chemical Analysis8vo,		25
Smith's Lecture Notes on Chemistry for Dental Students	2	50
Spencer's Handbook for Cane Sugar Manufacturers18mo, mor.	3	
Handbook for Chemists of Beet-sugar Houses16mo, mor.	3	
Stockbridge's Rocks and Soils		50
Stone's Practical Testing of Gas and Gas Meters		50
* Tillman's Descriptive General Chemistry	1	00 50
Treadwell's Qualitative Analysis. (Hall.)		00
Quantitative Analysis. (Hall.)8vo,		00
Turneaure and Russell's Public Water-supplies8vo,		00
Van Deventer's Physical Chemistry for Beginners. (Boltwood.)12mo.	1	
Venable's Methods and Devices for Bacterial Treatment of Sewage 8vo,	3	00
Ward and Whipple's Freshwater Biology. (In Press.)	,	
Ware's Beet-sugar Manufacture and Refining. Vol. I		00
VOL. 11.1	Đ	UŲ

Washington's Manual of the Chemical Analysis of Rocks8vo,	\$2	00
* Weaver's Military Explosives8vo,	3	00
Wells's Laboratory Guide in Qualitative Chemical Analysis8vo,	1	50
Short Course in Inorganic Qualitative Chemical Analysis for Engineering		
Students12mo,	1	50
Text-book of Chemical Arithmetic12mo,	1	25
Whipple's Microscopy of Drinking-water 8vo,	3	50
Wilson's Chlorination Process	1	50
Cyanide Processes12mo,	1	50
Winton's Microscopy of Vegetables Food8vo,	7	50
Zsigmondy's Colloids and the Ultramicroscope. (Alexander)Large 12mo,	3	00

CIVIL ENGINEERING.

BRIDGES AND ROOFS. HYDRAULICS. MATERIALS OF ENGINEER-ING. RAILWAY ENGINEERING.

Baker's Engineers' Surveying Instruments	3 00
Bixby's Graphical Computing Table	25
tary Surveying	3 00
Vol. II. Higher Surveying8vo,	2 50
* Burr's Ancient and Modern Engineering and the Isthmian Canal8vo,	3 50
Comstock's Field Astronomy for Engineers8vo,	2 50
* Corthell's Allowable Pressure on Deep Foundations	1 25
Crandall's Text-book on Geodesy and Least Squares8vo,	3 00
Davis's Elevation and Stadia Tables8vo,	1 00
Elliott's Engineering for Land Drainage	1 50
Practical Farm Drainage. (Second Edition Rewritten.)12mo,	1 50
* Fiebeger's Treatise on Civil Engineering8vo,	5 00
Flemer's Photographic Methods and Instruments8vo,	5 00
Folwell's Sewerage. (Designing and Maintenance.)8vo,	3 00
Freitag's Architectural Engineering8vo,	3 50
Goodhue's Municipal Improvements12mo,	1 50
* Hauch and Rice's Tables of Quantities for Preliminary Estimates12mo,	1 25
Hayford's Text-book of Geodetic Astronomy8vo,	3 00
Hering's Ready Reference Tables (Conversion Factors)16mo, mor.	2 50
Hosmer's Azimuth16mo, mor.	1 00
Howe' Retaining Walls for Earth	1 25
* Ives's Adjustments of the Engineer's Transit and Level 16mo, bds.	25
Johnson's (J. B.) Theory and Practice of Surveying Large 12mo,	4 00
Johnson's (L. J.) Statics by Algebraic and Graphic Methods	2 00
Kinnicutt, Winslow and Pratt's Purification of Sewage. (In Preparation).	
* Mahan's Descriptive Geometry	1 50 2 50
Merriman and Brooks's Handbook for Surveyors16mo, mor.	2 50
Nugent's Plane Surveying	3 50
Ogden's Sewer Construction	3 00
Sewer Design	2 00
Parsons's Disposal of Municipal Refuse	2 00
Patton's Treatise on Civil Engineering8vo, half leather,	7 50
Reed's Topographical Drawing and Sketching4to,	5 00
Rideal's Sewage and the Bacterial Purification of Sewage	4 00
Riemer's Shaft-sinking under Difficult Conditions. (Corning and Peele.).8vo,	3 00
Siebert and Biggin's Modern Stone-cutting and Masonry8vo,	1 50
Smith's Manual of Topographical Drawing. (McMillan.)8vo,	2 50
Soper's Air and Ventilation of Subways	2 50
* Tracy's Exercises in Surveying12mo, mor.	1 00
Tracy's Plane Surveying16mo, mor.	3 00
* Trautwine's Civil Engineer's Pocket-book	5 00
Venable's Garbage Crematories in America8vo,	2 00
Methods and Devices for Bacterial Treatment of Sewage8vo,	3 00

Wait's Engineering and Architectural Jurisprudence	o¢ O	50
Law of Contracts		00
Law of Operations Preliminary to Construction in Engineering and		
Architecture		00
ancep,		50 50
Warren's Stereotomy—Problems in Stone-cutting	~	OO
*Waterbury's Vest-Pocket Hand-book of Mathematics for Engineers.	1	00
Webb's Problem's in the Use and Adjustment of Engineering Instruments		
		25
Wilson's Topographic Surveying	3	50
BRIDGES AND ROOFS.		
Boller's Practical Treatise on the Construction of Iron Highway Bridges8vo,	2	00
* Thomas Divor Bridge Oblong Daper,		00
Burr and Falk's Design and Construction of Metallic Dridges		00
Influence Lines for Bridge and Roof Computations		00
Du Bois's Mechanics of Engineering. Vol. II	10	00
Foster's Treatise on Wooden Trestle Bridges4to,		50
Fowler's Ordinary Foundations. Svo. Greene's Arches in Wood, Iron, and Stone. Svo.		50
Reidon Traigges		50
Poof Tenses	1	25
Grimm's Secondary Stresses in Bridge Trusses		50
Heller's Stresses in Structures and the Accompanying Deformations		00
Howe's Design of Simple Roof-trusses in Wood and Steel		00 50
Symmetrical Masonry Arches		00
Treatise on Arches	•	017
Modern Framed Structures	10	00
Modern Framed Structures		
		50
Part II. Graphic Statics		50
Part III. Bridge Design8vo,		50 50
Part IV. Higher Structures	10	00
Morison's Memphis Bridge	117	CAL
Arches	2	00
Waddell's De Pontibus. Pocket-book for Bridge Engineers 16mo, mor.		00
* Specifications for Steel Bridges		50
Waddell and Harringtoon's Bridge Engineering. (In Preparation.)		EΛ
Wright's Designing of Draw-spans. Two parts in one volume8vo,	o	50
HYDRAULICS.		
		•
Barnes's Ice Formation	3	00
an Orifice. (Trautwine.)	,	OD
Royay's Treetise on Hydraulics		00
Bovey's Treatise on Hydraulics	Ī	
Oblong 4to, paper,	1	50
Hydraulic Motors		00
Coffin's Graphical Solution of Hydraulic Problems16mo, mor.		50
Flather's Dynamometers, and the Measurement of Power		00
Folwell's Water-supply Engineering		00
Fuertes's Water and Public Health		50
Water-filtration Works		50
Ganguillet and Kutter's General Formula for the Uniform Flow of Water in		
Rivers and Other Channels. (Hering and Trautwine.)8vo,	4	00
7		

Hazen's Clean Water and How to Get It	$\frac{3}{2}$	50 00 50
Conduits		00 00
*Lyndon's Development and Electrical Distribution of Water Power.	4	00
8vo, Mason's Water-supply. (Considered Principally from a Sanitary Stand-		00
point.)	5	00
* Molitor's Hydraulics of Rivers, Weirs and Sluices		00 50 00
* Thomas and Watt's Improvement of Rivers	6	00
Wegmann's Design and Construction of Dams. 5th Ed, enlarged 4to, Water-Supply of the City of New York from 1658 to 1895 4to.	6	00
Whipple's Value of Pure Water	1	00
Wilson's Irrigation Engineering		00 5 0
MATERIALS OF ENGINEERING.		
Baker's Roads and Pavements		00 00
Black's United States Public WorksOblong 4to, Blanchard's Bituminous Roads. (In Press) Bleininger's Manufacture of Hydraulic Cement. (In Preparation.)		00
* Bovey's Strength of Materials and Theory of Structures 8vo	7	50
Burr's Elasticity and Resistance of the Materials of Engineering		50 00
Inspection of the Materials and Workmanship Employed in Construction. 16mo,	3	00
Church's Mechanics of Engineering		00
Vol. I. Kinematics, Statics, Kinetics		50
* Eckel's Cements Limes and Plasters		00 00
Stone and Clay Products used in Engineering. (In Preparation.) Fowler's Ordinary Foundations		50
* Holley's Lead and Zinc Pigments		50 00
Large 12mo, Johnson s (C. M.) Rapid Methods for the Chemical Analysis of Special Steels,	2	50
Steel-making Alloys and Graphite. Large 12mo, Johnson's (J. B.) Materials of Construction. Large 8vo,		00
Keep's Cast Iron		00 50
Lanza's Applied Mechanics		50
Martens's Handbook on Torting Materials (IV.)	2	00
Martens's Handbook on Testing Materials. (Henning.) 2 vols	7	50 00
Merrill's Stones for Building and Decoration		00
Merriman's Mechanics of Materials	5	00
* Strength of Materials		00
Morrison's Highway Engineering	2	00 50
Patton's Practical Treatise on Foundations	5	00
Rice's Concrete Block Manufacture	2	00
U U		

Richardson's Modern Asphalt Pavements8vo,	\$3	00
Richey's Building Foreman's Pocket Book and Ready Reference. 16mo, mor.		00
* Cement Workers' and Plasterers' Edition (Building Mechanics' Ready	-	
Reference Series)16mo, mor.	1	50
Handbook for Superintendents of Construction16mo, mor.		00
*Stone and Brick Masons' Edition (Building Mechanics' Ready	7	00
Reference Series)	1	
* Ries's Clays: Their Occurrence, Properties, and Uses	5	00
* Ries and Leighton's History of the Clay-working Industry of the United		
States	2	50
Sabin's Industrial and Artistic Technology of Paint and Varnish 8vo,	3	00
Smith's Strength of Material		
Snow's Principal Species of Wood. 8vo, Spalding's Hydraulic Cement. 12mo,	3	50
Spalding's Hydraulic Cement. 12mo.		00
Text-book on Roads and Pavements 12mo,		00
Taylor and Thompson's Treatise on Concrete, Plain and Reinforced8vo.		00
Thurston's Materials of Engineering. In Three Parts8vo,		00
		00
Part II. Iron and Steel8vo,	3	50
Part III. A Treatise on Brasses, Bronzes, and Other Alloys and their	_	
Constituents8vo,		50
Tillson's Street Pavements and Paving Materials8vo,	4	00
Turneaure and Maurer's Principles of Reinforced Concrete Construction. Second Edition, Revised and Enlarged		
Second Edition, Revised and Enlarged	3	50
Waterbury's Cement Laboratory Manual	1	00
Wood's (De V.) Treatise on the Resistance of Materials, and an Appendix on		
the Preservation of Timber8vo,	2	00
Wood's (M. P.) Rustless Coatings: Corrosion and Electrolysis of Iron and	_	
Steel8vo,	4	00
210021111111111111111111111111111111111	•	00
RAILWAY ENGINEERING.		
As describe The March for Charact Delimon Business Co. S. S. Sanker and		0.5
Andrews's Handbook for Street Railway Engineers3×5 inches, mor.		25
Berg's Buildings and Structures of American Railroads4to,		00
Brooks's Handbook of Street Railroad Location16mo, mor.		50
Butts's Civil Engineer's Field-book		50
Crandall's Railway and Other Earthwork Tables8vo,		50
Transition Curve		50
* Crockett's Methods for Earthwork Computations8vo,	7	50
Dredge's History of the Pennsylvania Railroad. (1879)	5	00
Fisher's Table of Cubic Yards		25
Godwin's Railroad Engineers' Field-book and Explorers' Guide. 16mo, mor.	2	50
Hudson's Tables for Calculating the Cubic Contents of Excavations and Em-		
bankments8vo,	1	00
Ives and Hilts's Problems in Surveying, Railroad Surveying and Geodesy	_	
16mo, mor.	7	50
Molitor and Beard's Manual for Resident Engineers16mo,		00
Nagle's Field Manual for Railroad Engineers		00
* Orrock's Railroad Structures and Estimates		00
Philbrick's Field Manual for Engineers		00
Philbrick's Field Manual for Engineers		00
Philbrick's Field Manual for Engineers	3	
Philbrick's Field Manual for Engineers		50
Philbrick's Field Manual for Engineers	3	50
Philbrick's Field Manual for Engineers	3 3	50 00
Philbrick's Field Manual for Engineers	3 3 1	50 00 50
Philbrick's Field Manual for Engineers	3 3 1	50 00
Philbrick's Field Manual for Engineers	3 3 1	50 00 50
Philbrick's Field Manual for Engineers	3 3 1 1	50 00 50
Philbrick's Field Manual for Engineers	3 3 1 1	50 00 50 50
Philbrick's Field Manual for Engineers	3 3 1 1 2	50 00 50 50
Philbrick's Field Manual for Engineers	3 3 1 1 2 2	50 00 50 50 50
Philbrick's Field Manual for Engineers	3 3 1 1 2 2 2 2	50 00 50 50 50 50
Philbrick's Field Manual for Engineers	3 3 1 1 2 2 2 5	50 50 50 50 50 50
Philbrick's Field Manual for Engineers	3 3 1 1 2 2 2 5 5	50 50 50 50 50 50 00 00
Philbrick's Field Manual for Engineers	3 3 1 1 2 2 2 5 5	50 50 50 50 50 50

DRAWING.

Barr's Kinematics of Machinery8vo,	\$2	2 50
* Bartlett's Mechanical Drawing	3	00
* "	1	. 50
Coolidge's Manual of Drawing	1	. 00
Coolidge and Freeman's Elements of General Drafting for Mechanical Engi-		
neersOblong 4to,	2	2 50
Durley's Kinematics of Machines8vo,		00
Emch's Introduction to Projective Geometry and its Application 8vo,		50
French and Ives' Stereotomy Svo,	2	50
Hill's Text-book on Shades and Shadows, and Perspective8vo,	2	00
Jamison's Advanced Mechanical Drawing	2	00
Elements of Mechanical Drawing8vo,	2	50
Jones's Machine Design:		
Part I. Kinematics of Machinery8vo,	1	50
Part II, Form, Strength, and Proportions of Parts8vo,	3	00
Kimball and Barr's Machine Design (In Press.)		
MacCord's Elements of Descritpive Geometry8vo,	3	00
Kinematics; or, Practical Mechanism 8vo,	5	00
Mechanical Drawing.,4to,		00
Velocity Diagrams	1	50
McLeod's Descriptive Geometry Large 12mo,		50
* Mahan's Descriptive Geometry and Stone-cutting		50
Industrial Drawing. (Thompson.)8vo,		50
Moyer's Descriptive Geometry8vo,		00
Reed's Topographical Drawing and Sketching4to,		00
Reid's Course in Mechanical Drawing		00
Text-book of Mechanical Drawing and Elementary Machine Design8vo,		00
Robinson's Principles of Mechanism		00
Schwamb and Merrill's Elements of Mechanism		00
Smith (A. W.) and Marx's Machine Design		õõ
Smith's (R. S.) Manual of Topographical Drawing. (McMillan)8vo,		50
* Titsworth's Elements of Mechanical DrawingOblong 8vo,		25
Warren's Drafting Instruments and Operations12mo,		25
Elements of Descriptive Geometry, Shadows, and Perspective8vo,		50
Elements of Machine Construction and Drawing		50
Elements of Plane and Solid Free-hand Geometrical Drawing12mo,		00
General Problems of Shades and Shadows	â	00
Manual of Elementary Problems in the Linear Perspective of Forms and		00
Shadow12mo,	1	00
Manual of Elementary Projection Drawing		50
Plane Problems in Elementary Geometry		25
Problems, Theorems, and Examples in Descriptive Geometry8vo,		50
Weisbach's Kinematics and Power of Transmission. (Hermann and	-	0.,
Klein.)	5	00
Wilson's (H. M.) Topographic Surveying8vo,		50
* Wilson's (V. T.) Descriptive Geometry		50
Free-hand Lettering		00
Free-hand Perspective		50
Woolf's Elementary Course in Descriptive GeometryLarge 8vo,		00
	٠	00
ELECTRICITY AND PHYSICS.		
ELECTRICITI AND PHISICS.		
* Abegg's Theory of Electrolytic Dissociation. (von Ende.)12mo,		٥~
Andrews's Hand-book for Street Railway Engineering3×5 inches, mor.		25
Anthony and Brackett's Text-book of Physics. (Magie.)Large 12mo,		25
Anthony and Ball's Lecture-notes on the Theory of Electrical Measure-	3	00
ments	,	00
Benjamin's History of Electricity		00
Voltaic Cell		00

Betts's Lead Refining and Electrolysis	3 3 1 5	00 00 50 00 25 00
Duhem's Thermodynamics and Chemistry. (Burgess.). 8vo, Flather's Dynamometers, and the Measurement of Power. 12mo, Getman's Introduction to Physical Science. 12mo, Gilbert's De Magnete. (Mottelay). 8vo, *Hanchett's Alternating Currents. 12mo Hering's Ready Reference Tables (Conversion Factors). 16mo, mor. *Hobart and Ellis's High-speed Dynamo Electric Machinery. 8vo, Holman's Precision of Measurements. 8vo,	4 3 2 1 2 6	00 00 50 00 50 00 00
Telescopic Mirror-scale Method, Adjustments, and Tests. Large Svo, *Karapetoff's Experimental Electrical Engineering. Svo, Kinzbrunner's Testing of Continuous-current Machines. Svo, Landauer's Spectrum Analysis. (Tingle.) Svo, Le Chatclier's High-temperature Measurements. (Boudouard—Burgess.) 12m Lub's Electrochemistry of Organic Compounds. (Lorenz). Svo, *Lyndon's Development and Electrical Distribution of Water Power. Svo,	6 2 3 9, 3	75 00 00 00
* Lyons's Treatise on Electromagnetic Phenomena. Vols, I. and II. 8vo, each, * Michie's Elements of Wave Motion Relating to Sound and Light 8vo, Morgan's Outline of the Theory of Solution and its Results 12mo, * Physical Chemistry for Electrical Engineers	4 1 1 2	00 00 00 50 50
Reagan's Locomotives: Simple, Compound, and Electric. New Edition. Large 12mo, * Rosenberg's Electrical Engineering. (Haldane Gee—Kinzbrunner.). 8vo, Ryan, Norris, and Hoxie's Electrical Machinery. Vol. I	3 2 2 1 1 2	50 00 50 00 50 00 00
LAW.		
* Brennan's Hand-book of Useful Legal Information for Business Men. 18mo, mor. * Treatise on the Military Law of United States. * Treatise on the Military Law of United States. * Dudley's Military Law and the Procedure of Courts-martial. Large 12mo, Manual for Courts-martial. 16mo, mor. Wait's Engineering and Architectural Jurisprudence. Seco, Law of Contracts. Svo, Law of Operations Preliminary to Construction in Engineering and Architecture. Sheep,	2 7 2 1 6 6 3	00 50 00 50 50 50 00 50 00
MATHEMATICS.		
Baker's Elliptic Functions	1	50 00 00

Developed Transport Developed	\$1 00
Byerley's Harmonic Functions	2 00
* Coffin's Vector Analysis	2 50
Compton's Manual of Logarithmic Computations	1 50
* Dickson's College AlgebraLarge 12mo,	1 50
* Introduction to the Theory of Algebraic Equations Large 12mo,	1 25
Emch's Introduction to Projective Geometry and its Application8vo.	2 50
Fiske's Functions of a Complex Variable8vo.	1 00
Halstad's Flamentary Synthetic Geometry	1 50
Flaments of Geometry 8vo.	1 75
* Rational Geometry12mo.	1 50
Synthetic Projective Geometry	1 00
Hyde's Grassmann's Space Analysis	1 00
* Johnson's (J. B.) Three-place Logarithmic Tables: Vest-pocket size, paper.	15 5 00
*100 copies,	25
* Mounted on heavy cardboard, 8 × 10 inches. *10 copies,	2 00
	_ 00
Johnson's (W. W.) Abridged Editions of Differential and Integral Calculus. Large 12mo, 1 vol.	2 50
Curve Tracing in Cartesian Co-ordinates	1 00
Differential Equations 8vo.	1 00
Differential Equations	1 50
Elementary Treatise on the Integral Calculus	1 50
* Theoretical Mechanics	3 00
Theory of Errors and the Method of Least Squares 12mo,	1 50
Treatise on Differential Calculus	3 00
Treatise on the Integral CalculusLarge 12mo,	3 00
Treatise on Ordinary and Partial Differential EquationsLarge 12mo.	3 50
Karapetoff's Engineering Applications of Higher Mathematics.	
(In Preparation.) Laplace's Philosophical Essay on Probabilities, (Truscott and Emory.). 12mo,	2 00
* Ludlow and Bass's Elements of Trigonometry and Logarithmic and Other	2 00
Tables	3 00
* Trigonometry and Tables published separately	2 00
* Ludlow's Logarithmic and Trigonometric Tables	1 00
Macfarlane's Vector Analysis and Quaternions	1 00
McMahon's Hyperbolic Functions8vo,	1 00
Manning's Irrational Numbers and their Representation by Sequences and	
Series	1 25
Mathematical Monographs. Edited by Mansfield Merriman and Robert	
S. WoodwardOctavo, each	1 00
No. 1. History of Modern Mathematics, by David Eugene Smith. No. 2. Synthetic Projective Geometry, by George Bruce Halsted. No. 3. Determinants, by Laenas Gifford Weld. No. 4. Hyper-	
No. 2. Synthetic Projective Geometry, by George Bruce Haisted.	
bolic Functions by James McMahon, No. 5, Harmonic Func-	
tions by William E. Ryerly. No. 6 Grassmann's Space Analysis	
bolic Functions, by James McMahon. No. 5. Harmonic Functions, by William E. Byerly. No. 6. Grassmann's Space Analysis, by Edward W. Hyde. No. 7. Probability and Theory of Errors, by Robert S. Woodward. No. 8. Vector Analysis and Quaternions,	
by Robert S. Woodward. No. 8. Vector Analysis and Quaternions.	
by Alexander Macfarlane. No. 9. Differential Equations, by William Woolsey Johnson. No. 10. The Solution of Equations,	
William Woolsey Johnson. No. 10. The Solution of Equations,	
by Mansfield Merriman. No. 11. Functions of a Complex Variable,	
by Thomas S. Fiske.	
Maurer's Technical Mechanics	4 00
Merriman's Method of Least Squares	2 00
Solution of Equations	1 00
Large 12mo,	1 50
Elementary Treatise on the Differential Calculus Large 12mo	3 00
Smith's History of Modern Mathematics	1 00
* Veblen and Lennes's Introduction to the Real Infinitesimal Analysis of One	
Variable	2 00
* Waterbury's Vest Pocket Hand-book of Mathematics for Engineers.	
27×58 inches, mor.	1 00
Weld's Determinants	1 00
Wood's Elements of Co-ordinate Geometry	2 00
Woodward's Probability and Theory of Errors	1 00

MECHANICAL ENGINEERING.

MATERIALS OF ENGINEERING, STEAM-ENGINES AND BOILERS.

Bacon's Forge Practice	\$1	50
Baldwin's Steam Heating for Buildings	2	50
Barr's Kinematics of Machinery		50
* Bartlett's Mechanical Drawing8vo,		00
* " " Abridged Ed8vo,	_	50
* Burr's Ancient and Modern Engineering and the Isthmian Canal 8vo,	3	50
Carpenter's Experimental Engineering		00
Heating and Ventilating Buildings	4	00
Clerk's Gas and Oil Engine. (New edition in press.)	*	UU
Compton's First Lessons in Metal Working		۳A
	1	50
Compton and De Groodt's Speed Lathe	1	50
Coolidge's Manual of Drawing	1	00
Coolidge and Freeman's Elements of Genral Drafting for Mechanical En-	_	
gineersOblong 4to,		50
Cromwell's Treatise on Belts and Pulleys		50
Treatise on Toothed Gearing		50
Dingey's Machinery Pattern Making12mo,		00
Durley's Kinematics of Machines8vo,		00
Flanders's Gear-cutting Machinery Large 12mo,	3	00
Flather's Dynamometers and the Measurement of Power12mo,	3	00
Rope Driving	2	00
Gill's Gas and Fuel Analysis for Engineers	1	25
Goss's Locomotive Sparks	2	00
Greene's Pumping Machinery. (In Preparation.)		
Hering's Ready Reference Tables (Conversion Factors) 16mo, mor.	2	50
* Hobart and Ellis's High Speed Dynamo Electric Machinery 8vo,		00
Hutton's Gas Engine8vo,		00
Jamison's Advanced Mechanical Drawing8vo,		00
Elements of Mechanical Drawing		50
Jones's Gas Engine		00
Machine Design:	-1	00
Part I. Kinematics of Machinery8vo,	7	50
Part II. Form, Strength, and Proportions of Parts8vo,		00
Kent's Mechanical Engineer's Pocket-Book		00
Kent's Mechanical Engineer's Focket-Book		00
Kerr's Power and Power Transmission	2	UŲ
Kimball and Barr's Machine Design. (In Press.)		
Levin's Gas Engine. (In Press.)		
Leonard's Machine Shop Tools and Methods		00
* Lorenz's Modern Refrigerating Machinery. (Pope, Haven, and Dean)8vo,		00
MacCord's Kinematics; or, Practical Mechanism8vo,		00
Mechanical Drawing		00
Velocity Diagrams8vo,	1	
MacFarland's Standard Reduction Factors for Gases 8vo,		50
Mahan's Industrial Drawing. (Thompson.)8vo,		50
Mehrtens's Gas Engine Theory and DesignLarge 12mo,	2	
Oberg's Handbook of Small Tools Large 12mo,		00
* Pershall and Hobert's Electric Machine Design, Small 4to, half leather.	12	50
Peele's Compressed Air Plant for Mines	3	00
Poole's Calorific Power of Fuels	3	00
* Porter's Engineering Reminiscences, 1855 to 1882 8vo,	3	00
Reid's Course in Mechanical Drawing	2	00
Tayt-book of Mechanical Drawing and Elementary Machine Design. 8vo.	3	00
Richards's Compressed Air	ī	50
Robinson's Principles of Mechanism	3	00
Schwamb and Merrill's Elements of Michanism		00
Smith (A. W.) and Marx's Machine Design		00
Smith's (O.) Press-working of Metals		00
Sorei's Carbureting and Combustion in Alcohol Engines. (Woodward and	_	
Desertor) Large 12mo	3	00
Preston.)		50

Thurston's Animal as a Machine and Prime Motor, and the Laws of Energetics.		
12mo,		
Treatise on Friction and Lost Work in Machinery and Mill Work8vo,		0
* Tillson's Complete Automobile Instructor		5
* Titsworth's Elements of Mechanical DrawingOblong 8vo,	1	2
Warren's Elements of Machine Construction and Drawing	- 1	5
waterbury's vest rocket find-book of Mathematics for Engineers. $2\frac{7}{8} \times 5\frac{1}{8}$ inches, mor.	1	0
Weisbach's Kinematics and the Power of Transmission. (Herrmann—	-	٠,
Klein.)	5	00
Machinery of Transmission and Governors. (Hermann—Klein.)8vo, Wood's Turbines	5	00
Wood's Turbines	2	50
MATERIALS OF ENGINEERING.		
* Bovey's Strength of Materials and Theory of Structures8vo.	7	50
Burr's Elasticity and Resistance of the Materials of Engineering8vo,		50
Church's Mechanics of Engineering		00
* Greene's Structural Mechanics		50
* Holley's Lead and Zinc PigmentsLarge 12mo Holley and Ladd's Analysis of Mixed Paints, Color Pigments, and Varnishes.		00
Large 12mo,	2	50
Johnson's (C. M.) Rapid Methods for the Chemical Analysis of Special	_	
Steels, Steel-Making Alloys and Graphite Large 12mo,		00
Johnson's (J. B.) Materials of Construction		00 50
Lanza's Applied Mechanics Syo		50
Lanza's Applied Mechanics 8vo, Maire's Modern Pigments and their Vehicles		00
Martens's Handbook on Testing Materials. (Henning.)		50
Maurer's Techincal Mechanics8vo,	4	00
Merriman s Mechanics of Materials		00
* Strength of Materials		00
Metcalf's Steel. A Manual for Steel-users		00
Sabin's Industrial and Artistic Technology of Paint and Varnish 8vo, Smith's ((A. W.) Materials of Machines		00
Smith's (H. E.) Strength of Material		UU
Thurston's Materials of Engineering	8	00
Part I. Non-metallic Materials of Engineering,	2	
Part II. Iron and Steel	3	50
Part III. A Treatise on Brasses, Bronzes, and Other Alloys and their		
Constituents8vo,	2	
Wood's (De V.) Elements of Analytical Mechanics	3	00
Preservation of Timber	2	nΛ
Preservation of Timber 8vo, Wood's (M. P.) Rustless Coatings Corrosion and Electrolysis of Iron and	~	vv
Steel	4	00
STEAM-ENGINES AND BOILERS.		
SIEAM-ENGINES AND BOILERS.		
Berry's Temperature-entropy Diagram	2	იი
Berry's Temperature-entropy Diagram	ĩ.	
Chase's Art of Pattern Making12mo,	2.	50
Creighton's Steam-engine and other rieat Motors	5	
Dawson's "Engineering" and Electric Traction Pocket-book16mo, mor. Ford's Boiler Making for Boiler Makers	5	
* Gebhardt's Steam Power Plant Engineering	1 (
Goss's Locomotive Performance	5 (
Hemenway's Indicator Practice and Steam-engine Economy 12mo	2 (
Hutton's Heat and Heat-engines	5	
Mechanical Engineering of Power Plants8vo.	5 (00
Kent's Steam boiler Economy	1 1	M

Micass's fractice and theory of the injector	Ψ.	50
MacCord's Slide-valves	. 2	00
Meyer's Modern Locomotive Construction4to	. 10	
Moyer's Steam Turbine8vo		00
Peabody's Manual of the Steam-engine Indicator	. 1	50
Tables of the Properties of Steam and Other Vapors and Temperature-		
Entropy Table	. 1	00
Thermodynamics of the Steam-engine and Other Heat-engines 8vo	5	00
Valve-gears for Steam-engines8vo		50
		00
Peabody and Miller's Steam-boilers8vo	4	UU
Pupin's Thermodynamics of Reversible Cycles in Gases and Saturated Vapors		
(Osterberg.)	1	25
Reagan's Locomotives: Simple, Compound, and Electric. New Edition.		
Large 12mo.		50
Sinclair's Locomotive Engine Running and Management12mo,	2	00
Smart's Handbook of Engineering Laboratory Practice	2	50
Snow's Steam-boiler Practice8vo,		00
Spangler's Notes on Thermodynamics	1	00
Valve-gears 8vo		50
Valve-gears	- 2	00
Themse's Cteam tradition	4	00
Thomas's Steam-turbines	*	w
Indiston's Handbook of Engine and Boller Thats, and the Use of the Indi-	_	00
cator and the Prony Brake8vo,		00
Handy Tables8vo,		50
Handy Tables		00
Manual of the Steam-engine	10	00
Part I. History, Structure, and Theory8vo,	6	00
Part II. Design, Construction, and Operation8vo,	6	00
Steam-boiler Explosions in Theory and in Practice12mo,	1	50
Wehrenfennig's Analysis and Softening of Boiler Feed-water. (Patterson).		
8vo	. 4	00
Weisbach's Heat, Steam, and Steam-engines. (Du Bois.)8vo,		00
Weisbach's ficat, becam, and becam enginess (Sa Bois).		
Whitham's Steam angine Design	- 5	
Whitham's Steam-engine Design8vo,		00
Whitham's Steam-engine Design		00
Whitham's Steam-engine Design		
Whitham's Steam-engine Design	ā	
Whitham's Steam-engine Design	ā	00
Whitham's Steam-engine Design	4	00
Whitham's Steam-engine Design	6 2	00
Whitham's Steam-engine Design	4 6 2 1	00
Whitham's Steam-engine Design	6 2	00 00 50
Whitham's Steam-engine Design	6 2 1 3 4	00 00 50 50
Whitham's Steam-engine Design	6 2 1 3 4 7	00 00 50 50 50
Whitham's Steam-engine Design	6 2 1 3 4 7	00 00 50 50 50 00
Whitham's Steam-engine Design	6 2 1 3 4 7	00 00 50 50 50
Whitham's Steam-engine Design	6 2 1 3 4 7 10 2	00 00 50 50 50 50 50
Whitham's Steam-engine Design	6 2 1 3 4 7 10 2	00 00 50 50 50 00 50
Whitham's Steam-engine Design	6 2 1 3 4 7 10 2 · 2 3	00 00 50 50 50 00 50 00 00
Whitham's Steam-engine Design	6 2 1 3 4 7 10 2 · 2 3 7	00 00 50 50 00 50 00 50 00 50
Whitham's Steam-engine Design	621 344 7102 • 2371	00 00 50 50 50 00 50 00 50 00 50 25
Whitham's Steam-engine Design	6 2 1 3 4 7 10 2 3 7 1	00 00 50 50 50 00 50 00 50 00 50 50 50 5
Whitham's Steam-engine Design	6 2 1 3 4 7 10 2 · 2 3 7 1 1 4	00 00 50 50 50 00 50 00 50 00 50 00 50 00 50
Whitham's Steam-engine Design	6 2 1 3 4 7 10 2 · 2 3 7 1 1 4 1	00 00 50 50 50 50 00 50 50 00 50 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 5
Whitham's Steam-engine Design	621 344 702 • 237 114 15	00 00 50 50 00 50 50 00 50 00 50 00 00 0
Whitham's Steam-engine Design	621 344 702 • 237 114 15	00 00 50 50 50 50 00 50 50 00 50 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 5
Whitham's Steam-engine Design. 8vo, Wood's Thermodynamics, Heat Motors, and Refrigerating Machines. 8vo, MECHANICS PURE AND APPLIED. Church's Mechanics of Engineering. 8vo, Notes and Examples in Mechanics. 8vo, Dana's Text-book of Elementary Mechanics for Colleges and Schools .12mo, Du Bois's Elementary Principles of Mechanics: 8vo, Vol. I. Kinematics. 8vo, Vol. II. Statics. 8vo, Wechanics of Engineering. Vol. I. 8mall 4to, *Greene's Structural Mechanics. 8vo. James's Kinematics of a Point and the Rational Mechanics of a Particle. Large 12mo, *Johnson's (W. W.) Theoretical Mechanics. 12mo, Lanza's Applied Mechanics. 8vo, *Martin's Text Book on Mechanics, Vol. I, Statics. 12mo, Maurer's Technical Mechanics. 8vo, *Merriman's Elements of Mechanics. 12mo, Mechanics of Materials. 8vo, *Merriman's Elements of Mechanics. 12mo, Mechanics of Materials. 8vo, *Mechanics of Materials. 8vo, *Mothers's Elements of Analytical Mechanics. 8vo,	621 344 702 · 237114154	00 00 50 50 00 50 50 00 50 00 50 00 00 0
Whitham's Steam-engine Design	621 347 102 • 237 1141 543	00 00 50 50 00 50 00 50 00 50 00 00 00 0
Whitham's Steam-engine Design	621 347 102 · 237 11415481	00 00 50 50 50 50 50 50 50 60 60 60 60 60 60 60 60 60 60 60 60 60
Whitham's Steam-engine Design	621 347 102 · 237 114154 313	00 00 50 50 00 50 00 50 00 50 00 50 00 0
Whitham's Steam-engine Design	6 2 1 3 4 7 10 2 · 2 3 7 7 1 1 4 4 1 5 4 4 3 1 3 3	00 00 50 50 50 50 50 50 60 50 60 60 60 60 60 60 60 60 60 60 60 60 60

MEDICAL.

* Abderhalden's Physiological Chemistry in Thirty Lectures. (Train and	\$5	വ
* Abderhalden's Physiological Chemistry in Thirty Becture. 8vo, 8vo, 12mo	1	ÖÖ
von Behring's Suppression of Tuberculosis. (Bolduan). 12mo, Bolduan's Immune Sera		50
Bolduan's Immune Sera Bordet's Studies in Immunity. (Gay). (In Press.)	•	.,.,
Bordet's Studies in Immunity. (Gay). (In Pless.). Davenport's Statistical Methods with Special Reference to Biological Varia-		
Davenport's Statistical Methods with Special Reference to Dissiplining mor.	1	50
Davenport's Statistical Methods with Special Receivable 16mo, mor. tions		00
Enrich's Collected Studies on Infinituality. (Bolddam.). Large 12mo.	_	OO
de Fursac's Manual of Psychiatry. (Rosanoff and Collins.)Large 12mo,		50
Hammarsten's Text-book on Physiological Chemistry. (Mandel.) 8vo,		00
Jackson's Directions for Laboratory Work in Physiological Chemistry. 8vo,	1	25
Lassar-Cohn's Practical Urinary Analysis. (Lorenz.)		00
35. 3-12. Used heals for the Bio-Chemical Laboratory	1	50
* Pauli: Physical Chemistry in the Service of Medicine (Fischer.)12mo, Pozzi-Escot's Toxins and Venoms and their Antibodies. (Cohn.)12mo,	1	25
* Possi Fecot's Toying and Venoms and their Antibodies. (Cohn.). 12mo.	1	00
Destadió Comuna Diognocia (Boldman)	1	00
Puddiman's Incompatibilities in Prescriptions	2	00
Whys in Dharmacy	1	00
Salkowski's Physiological and Pathological Chemistry. (Urngorn.)	2	50
* Satterlee's Outlines of Human Embryology	1	25
Smith's Lecture Notes on Chemistry for Dental Students	2	50
* Whichle's Tuhnoid Fever Large 12mo,	3	00
Woodhull's Notes on Military Hygiene		50
* Personal Hygiene	1	00
Worcester and Atkinson's Small Hospitals Establishment and Maintenance,		
and Suggestions for Hospital Architecture, with Plans for a Small		
Hospital12mo,	1	25
METALLITACA		
METALLURGY.		
D	,	00
Betts's Lead Refining by Electrolysis	4	00
Bolland's Encyclopedia of Founding and Dictionary of Foundry Terms used	•	00
in the Practice of Moulding		50
Iron Founder. 12mo, " Supplement. 12mo,		50
Douglas's Untechnical Addresses on Technical Subjects		00
	Τ.	
Casalla Missaala and Matalas A Defendance Deals 18mo mon	9	
Goesel's Minerals and Metals: A Reference Book18mo, mor.		00
* Iles's Lead-smelting		50
* Iles's Lead-smelting	2	50
* Iles's Lead-smelting 12mo, Johnson's Rapid Methods for the Chemical Analysis of Special Steels, Steel-making Alloys and Graphite Large 12mo,	2 3	50 00
* Iles's Lead-smelting	2 3	50
* Iles's Lead-smelting	3 2	50 00 50
* Iles's Lead-smelting	3 2 3	50 00 50 00
* Iles's Lead-smelting	2 3 2 3 2	50 00 50 00 00
* Iles's Lead-smelting	2 3 2 3 2	50 00 50 00
* Iles's Lead-smelting	2 3 2 3 2 2	50 50 50 00 00 50
* Iles's Lead-smelting	2 3 2 3 2 2 1	50 00 50 00 00
* Iles's Lead-smelting	2 3 2 3 2 2 1 2	50 50 50 00 00 50
* Iles's Lead-smelting	2 3 2 3 2 2 1 2	50 50 50 00 00 50
* Iles's Lead-smelting	2 3 2 3 2 2 1 2	50 50 50 00 00 50
* Iles's Lead-smelting	3 2 3 2 2 2 8	50 50 50 00 00 50
* Iles's Lead-smelting	3 2 3 2 2 2 8	50 50 50 00 00 50 00 00
* Iles's Lead-smelting	2 3 2 2 2 2 8	50 50 50 00 00 50 00 00
* Iles's Lead-smelting	2 3 2 2 2 2 8 3 2 2 8	50 00 50 00 50 00 00 00 50 50
* Iles's Lead-smelting	2 3 2 2 2 2 2 8 3 2 2 2 8	50 00 50 00 00 50 00 00 00 50
* Iles's Lead-smelting	2 3 2 2 2 2 2 8 3 2 2 2 8	50 00 50 00 50 00 00 00 50 50

MINERALOGY.

Producer Wale Object of Plantage (Y. P.		
Baskerville's Chemical Elements (In Preparation.). Boyd's Map of Southwest Virginia	\$ 2	00
* Browning's Introduction to the Karer Elements	1	50
Brush's Manual of Determinative Mineralogy (Penfield.)8vo,		00
Butler's Pocket Hand-book of Minerals 16mo mor		00
Chester's Catalogue of Minerals		00
		25
* Crane's Gold and Silver		00
Dana's First Appendix to Dana's New "System of Mineralogy" Large 8vo,		00
Dana's Second Appendix to Dana's New "System of Mineralogy."		(/(/
Large 8vo,		nα
Manual of Mineralogy and Petrography		00
Minerals and row to Study Them		50
System of Mineralogy Large 8vo, half leather,		50
Text-book of Mineralogy8vo,		00
Douglas's Untechnical Addresses on Technical Subjects,		00
Eakle's Mineral Tables	1	25
Eckel's Stone and Clay Products Used in Engineering. (In Preparation).		
Goesel's Minerals and Metals: A Reference Book16mo, mor.		00
Groth's Introduction to Chemical Crystallography (Marshall)12mo,		25
* Hayes's Handbook for Field Geologists		50
Iddings's Igneous Rocks		00
Rock Minerals	5	00
Johannsen's Determination of Rock-forming Minerals in Thin Sections. 8vo.		
With Thumb Index	5	00
* Martin's Laboratory Guide to Qualitative Analysis with the Blow-		
pipe		60
Merrill's Non-metallic Minerals. Their Occurrence and Uses	4	00
Stones for Building and Decoration8vo.	5	00
* Penfield's Notes on Determinative Mineralogy and Record of Mineral Tests		
8vo, paper,		50
Tables of Minerals, Including the Use of Minerals and Statistics of		
Domestic Production8vo.	1	00
* Pirsson's Rocks and Rock Minerals	2	50
* Richards's Synopsis of Mineral Characters	1	25
* Ries's Clays: Their Occurrence, Properties and Uses8vo.	5	00
* Ries and Leighton's History of the Clay-working Industry of the United		
States8vo,	2	50
* Tillman's Text-book of Important Minerals and Rocks8vo	2	00
Washington's Manual of the Chemical Analysis of Rocks 8vo,		00
• • • • • • • • • • • • • • • • • • • •		
MINING.		
* Beard's Mine Gases and Explosions Large 12mo,		^^
Beard's wine traces and Exposions Large 12mo,		00
Boyd's Map of Southwest VirginiaPocket-book form,		00
* Crane's Gold and Silver8vo		00
* Index of Mining Engineering Literature8vo		00
* 8vo. mor.		00
Douglas's Untechnical Addresses on Technical Subjects	1	
Eissler's Modern High Explosives	4	
Goesel's Minerals and Metals: A Reference Book16mo, mor.	3	
Ihlseng's Manual of Mining		00
* Iles's Lead Smelting		50
Peele's Compressed Air Plant for Mines	3	
Riemer's Shaft Sinking Under Difficult Conditions. (Corning and Peele).8vo.	3	
* Weaver's Military Explosives8vo.		00
Wilson's Hydraulic and Placer Mining. 2d edition rewritten 12mo.		50
Treatise on Practical and Theoretical Mine Ventilation 12mo.	1	25

SANITARY SCIENCE.

Association of State and National Food and Dairy Departments, Hartford		
Meeting, 1906	\$3	00
Jamestown Meeting, 1907 8vo,	3	00
* Bashore's Outlines of Practical Sanitation	1	25
Sanitation of a Country House	1	00
Sanitation of Recreation Camps and Parks	1	00
Folwell's Sewerage. (Designing, Construction, and Maintenance.) 8vo,	3	
Water-supply Engineering 8vo,	4	
Fowler's Sewage Works Analyses	2	
Fuertes's Water-filtration Works		50
Water and Public Health12mo,		50
Gerhard's Guide to Sanitary Inspections		50
* Modern Baths and Bath Houses8vo,		00
Sanitation of Public Buildings	ī	
Hazen's Clean Water and How to Get It Large 12mo,	1	50
Filtration of Public Water-supplies		00
Kinnicut, Winslow and Pratt's Purification of Sewage. (In Preparation)	_	
Leach's Inspection and Analysis of Food with Special Reference to State		
Control	7	50
Mason's Examination of Water. (Chemical and Bacteriological)12mo,	1	
Water-supply. (Considered principally from a Sanitary Standpoint).		
8vo.	4	00
* Merriman's Elements of Sanitary Enigneering		00
Ogden's Sewer Construction8vo,		00
Sewer Design12mo,	2	
Parsons's Disposal of Municipal Refuse	2	
Prescott and Winslow's Elements of Water Bacteriology, with Special Refer-	-	00
ence to Sanitary Water Analysis	1	50
* Price's Handbook on Sanitation		50
Richards's Cost of Cleanness		00
Cost of Food. A Study in Dietaries		00
Cost of Living as Modified by Sanitary Science		00
Cost of Shelter	-	00
* Richards and Williams's Dietary Computer	î	
Richards and Woodman's Air, Water, and Food from a Sanitary Stand-	-	•
point	2	00
*Richey's Plumbers', Steam-fitters', and Tinners' Edition (Building	-	00
Mechanics' Ready Reference Series)	1	50
Rideal's Disinfection and the Preservation of Food		00
Sewage and Bacterial Purification of Sewage8vo,		00
Soper's Air and Ventilation of Subways		50
Turneaure and Russell's Public Water-supplies		00
Venable's Garbage Crematories in America		00
Method and Devices for Bacterial Treatment of Sewage 8vo.		00
Ward and Whipple's Freshwater Biology. (In Press.)	-	
Whipple's Microscopy of Drinking-water8vo,	3	50
* Typhoid Fever Large 12mo,		00
Value of Pure Water Large 12mo,		00
Winslow's Systematic Relationship of the CoccaceaLarge 12mo,		50
• • • • • • • • • • • • • • • • • • • •	_	
MISCELLANEOUS.		
Emmons's Geological Guide-book of the Rocky Mountain Excursion of the		
International Congress of Geologists	1	50
Ferrel's Popular Treatise on the Winds8vo.		00
Fitzgerald's Boston Machinist		00
Gannett's Statistical Abstract of the World	-	75
Haines's American Railway Management	2	50
Hanausek's The Microscopy of Technical Products. (Winton)8vo.		00

Jacobs's Betterment Briefs. A Collection of Published Papers on Or-		
ganized Industrial Efficiency8vo,	\$3	-50
Metcalfe's Cost of Manufactures, and the Administration of Workshops8vo,	5	00
Putnam's Nautical Charts	2	00
Ricketts's History of Rensselaer Polytechnic Institute 1824-1894		
Large 12mo,	3	OO
	2	00
Rust's Ex-Meridian Altitude, Azimuth and Star-finding Tables8vo,	5	00
Standage's Decoration of Wood, Glass, Metal, etc	2	00
Thome's Structural and Physiological Botany. (Bennett)16mo,	2	25
Westermaier's Compendium of General Botany. (Schneider)8vo	2	00
Winslow's Elements of Applied Microscopy	1	50

HEBREW AND CHALDEE TEXT-BOOOKS.

Gesenius's Hebrew and Chaldee Lexicon to the Old Testament Scriptures.	
(Tregelles.)Small 4to, half mor.	5 00
Green's Elementary Hebrew Grammar	1 25

